



# AGRICULTURE SOLUTIONS

# HEAVY DUTY POLY DIESEL TANKS

Designed to withstand the harshest conditions, these strong, lightweight tanks are built with safety features and reliable premium quality diesel pumps to give you peace of mind when refueling is required.

- 12V Self Priming Electric pump kit
- Built-in suction hose
- Automatic nozzle
- Lockable lid for security
- Internal suction line strainer fitted
- 30 minute duty cycle
- Moulded carry handles  
(Only models MDTN400L & MDT300L)



## POLY DIESEL TANKS - 40 LPM

- 100L, 200L, 300L, 400L, N400L and 600L storage tank capacity
- Equipped with premium quality 12V electric diesel pump kit
- Delivers flow rate of up to 40 LPM
- 3/4" x 4m delivery hose
- Anti-static delivery hose

PART NUMBER	CAPACITY	FLOW RATE	DIMENSIONS	TANK NET WEIGHT
MDT100L	100L	40 LPM	800L x 680W x 465H	30 KG
MDT200L	200L	40 LPM	800L x 680W x 710H	36 KG
MDT300L	300L	40 LPM	1290L x 600W x 770H	42 KG
MDT400L	400L	40 LPM	1150L x 820W x 780H	45 KG
MDTN400L	400L	40 LPM	1290L x 600W x 965H	45 KG
MDT600L	600L	40 LPM	1700L x 880W x 740H	65 KG

## POLY DIESEL TANKS - 60 LPM

- 800L, 1000L and 1200L storage tank capacity
- Equipped with premium quality 12V high flow electric diesel pump kit
- Delivers flow rate of up to 60 LPM
- 1" x 4m delivery hose
- Anti-static delivery hose
- Earthing cable

PART NUMBER	CAPACITY	FLOW RATE	DIMENSIONS	TANK NET WEIGHT
MDT800L-60LPM	800L	60 LPM	1700L x 1000W x 860H	85 KG
MDT1000L-60LPM	1000L	60 LPM	1700L x 1000W x 1025H	95 KG
MDT1200L-60LPM	1200L	60 LPM	1700L x 1000W x 1190H	99 KG



## POLY DIESEL TANKS - 85 LPM

- 800L, 1000L and 1200L storage tank capacity
- Baffles included on 1000L & 1200L models
- Equipped with premium quality 12V high flow electric diesel pump kit
- Delivers flow rate of up to 85 LPM
- 1" x 4m delivery hose
- Anti-static delivery hose
- Earthing cable

PART NUMBER	CAPACITY	FLOW RATE	DIMENSIONS	TANK NET WEIGHT
MDT800L	800L	85 LPM	1700L x 1000W x 860H	85 KG
MDT1000L	1000L	85 LPM	1700L x 1000W x 1025H	95 KG
MDT1200L	1200L	85 LPM	1700L x 1000W x 1190H	99 KG

### Applications:

Ideal addition to the back of a Service truck, Ute or portable diesel fuel system.

# POLY TANKS FOR DIESEL AND ADBLUE/DEF lubemate

The range of Poly Diesel tanks from Lubemate are the economical alternative for your diesel transport and dispensing requirements. Constructed from durable, high-density rotomolded polyethylene.

- 12V electric pump,
- Built-in suction hose
- Auto-shut-off dispense nozzle
- 3/4" x 4m of delivery hose
- Internal suction strainer fitted
- 30 minute duty cycle
- Lockable lid for security

**TANK**  
**3**  
**YEARS**  
MACNAUGHT  
WARRANTY

**PUMP**  
**12**  
**MONTHS**  
MACNAUGHT  
WARRANTY

FUEL EQUIPMENT

## POLY DIESEL TANKS - 40 LPM

- 200L, 400L storage tank capacity
- Delivers flow rate up to 40 LPM
- Anti-static delivery hose
- Level gauge included

PART NUMBER	CAPACITY	FLOW RATE	DIMENSIONS	TANK NET WEIGHT
L-PDT200	200L	40 LPM	1100L x 640W x 610H	35 KG
L-PDT400	400L	40 LPM	1150L x 800W x 680H	53 KG



L-PDT200

L-PDT400

## ADBLUE/DEF TANKS

- 200L AdBlue/DEF Tank
- 330/50L combo tank that can be used for both diesel and AdBlue
- Includes all hoses, nozzles and fittings

PART NUMBER	CAPACITY	FLOW RATE	DIMENSIONS	TANK NET WEIGHT
L-PABT200	200L ADBLUE/DEF	26 LPM	1100L x 640W x 610H	35 KG
L-PCT33050	330/50L DIESEL & ADBLUE COMBO	40/17 LPM	1150L x 800W x 680H	68 KG



L-PCT33050

L-PABT200



**2**  
YEARS  
MACNAUGHT  
WARRANTY

### ELECTRIC ADBLUE PUMPS EABP34-240V

- Flow rate: 34 L/m
- Voltage - 240V
- Duty Cycle - 20min
- Inlet/Outlet: 1" BSP-G Male
- Hose Stem (barb) is Ø20 x 1" BSP-G Female



**12**  
MONTHS  
MACNAUGHT  
WARRANTY

### 240V UREA/DEF IBC TRANSFER PUMP KIT L-UPM240V

- Flow rate up to 25 LPM
- Suitable for Urea/DEF & water
- Continuous duty cycle
- Inlet/Outlet: 3/4"
- Self-priming diaphragm pump
- Includes meter, manual nozzle hoses and fittings



**5**  
YEARS  
MACNAUGHT  
WARRANTY

### 12V WALL MOUNT DIESEL PUMP KIT AHFP12A

- Flow rate up to 60 LPM
- Suitable for diesel use only
- 30min duty cycle
- Current: 28 amps
- Inlet / Outlet: 1"BSPP (F)
- Includes auto nozzle, meter hose and fittings



**5**  
YEARS  
MACNAUGHT  
WARRANTY

### ELECTRIC DIESEL PUMP KIT AHFP85L-12A

- Flow rate up to 85 LPM
- Suitable for Diesel use only
- Inlet/Outlet: 1" BSP (F)
- Supplied with 4m long delivery hose, 2m long suction hose, fittings and auto nozzle



**5**  
YEARS  
MACNAUGHT  
WARRANTY

**12V ELECTRIC DIESEL PUMP KIT 40 LPM AFP12A**

- Flow rate up to 40 LPM
- Suitable for diesel use only
- 30 minute duty cycle
- 12V or 24V options available
- Automatic nozzle
- Supplied with 4m long delivery hose, 2m long suction hose and fittings



**5**  
YEARS  
MACNAUGHT  
WARRANTY

**12V ELECTRIC DIESEL PUMP 60 LPM ADP12A-60LP**

- Flow rate of 60 LPM
- Suitable for diesel use only
- 30min duty cycle
- 12V DC Electric diesel pump



**5**  
YEARS  
MACNAUGHT  
WARRANTY

**12V ELECTRIC DIESEL PUMP KIT 60 LPM ADP12A**

- Flow rate of 60 LPM
- Suitable for diesel use only
- 30min duty cycle
- 12V DC Electric diesel pump

**Kit contains:**

- 12V 60 LPM Diesel pump - ADP12A-60LP
- 25mm x 4m Delivery hose
- 25mm x 1.2m Suction hose
- 1" Automatic hi-flow diesel nozzle
- 1 x Strainer, 2 x Swivels, 1 x Elbow

\*Not suitable for MDT 100-600L tanks



**2**  
YEARS  
MACNAUGHT  
WARRANTY

**DIESEL INLINE METER ADTFM-2**

- Flow rate: 4 - 120 LPM
- Digital Turbine Meter for low viscosity fluids, easy to install inline or end of line applications
- Bi-directional: Either port can be used for Inlet or Outlet
- Inlet/Outlet: 1" BSP (F)
- IP55 Rating



**10**  
YEARS  
MACNAUGHT  
WARRANTY

**RAPIDFLO ROTARY FUEL PUMP GT-01**

- Suitable for 60 - 205 L drums
- Delivers 800ml per revolution (Up to 100 LPM)
- 2.4m anti-static rubber delivery hose
- Suitable for Diesel, ULP, Kerosene, Aviation fluids and lubricating oils up to SAE30



**10**  
YEARS  
MACNAUGHT  
WARRANTY

**ROTARY VANE PUMP RVP-01**

- Suits both 205 & 60 L drums via sliding bung adaptor
- Delivers up to 20 LPM (in both directions)
- Suitable for Diesel, Kerosene and oils up to SAE90



**12**  
MONTHS  
MACNAUGHT  
WARRANTY

**CHEMICAL ROTARY VANE PUMP L-MACP200**

- Suitable for transferring mineral oils, acids, alkalis, alcohols, diesel, coolants, water-based chemicals and clean or salt waters. AdBlue/ DEF compatible (check compatibility)
- Suitable for 60 L or 205 L containers



**5**  
YEARS  
MACNAUGHT  
WARRANTY

**240V DIESEL MINI BOWSER 60 LPM AMB60L**

- Suitable for Diesel use only
- Flow rate up to 60 LPM
- Inlet/Outlet: 1" BSP (F)
- 30-minute duty cycle
- Automatic Nozzle

**240V DIESEL MINI BOWSER 100LPM 6M HOSE AMB100L-6M**

- Suitable for Diesel use only
- Flow rate up to 100 LPM
- Inlet/Outlet: 1" BSP (F)
- 30-minute duty cycle
- Automatic Nozzle



**12**  
MONTHS  
MACNAUGHT  
WARRANTY

**240V DIESEL MINI BOWSER 80 LPM L-HMBA240V**

- This MINI BOWSER UNIT is a complete package for the safe, economical and efficient delivery of diesel
- The pump contained in the unit delivers up to 80 LPM free flow



**POSITIVE DISPLACEMENT MECHANICAL FUEL METER**  
**DM100-01**

- Operating pressure up to 345 kPa (50 psi)
- Accuracy around +/- 1.0% of reading
- Flow range between 3-80 LPM
- Suitable for Petrol, Diesel, ULP, Kerosene and light oils
- Inlet/Outlet: 1" BSP (F)

**10**  
YEARS  
MACNAUGHT  
WARRANTY



**MECHANICAL DIESEL METER**  
**AMFM**

- Flow range: 20 - 120 LPM
- Suitable for diesel, kerosene and light oils
- Inlet/Outlet - 1" BSP (F)
- Maximum working pressure 50 psi
- 4-digit resettable total

**5**  
YEARS  
MACNAUGHT  
WARRANTY



**MECHANICAL DIESEL METER**  
**L-FM25**

- Flow range: 20 - 120 LPM
- Suitable for either diesel or kerosene
- Maximum operating pressure - 49 psi
- Inlet/Outlet: 1" BSP
- 4-digit resettable totaliser

**12**  
MONTHS  
MACNAUGHT  
WARRANTY



**DIGITAL DIESEL TURBINE METER**  
**ADTFM**

- Flow rate 10 - 150 LPM
- Suitable for diesel, kerosene and coolants
- Operating pressure up to 345 kPa (50 psi)
- Inlet/Outlet: 1" BSP

**5**  
YEARS  
MACNAUGHT  
WARRANTY



**FUEL NOZZLE MANUAL ULP**  
**45 LPM**  
**L-FNMU**

- 3/4" BSP (F) inlet
- 13/16" O.D. spout
- Suitable for ULP
- Up to 45 LPM Flow rate (not suitable for gravity applications)



**FUEL NOZZLE AUTO ULP**  
**45 LPM**  
**L-FNAU**

- ULP Automatic shut-off nozzle
- 3/4" BSP (F) inlet
- 13/16" O.D. spout
- Up to 45 LPM Flow rate (not suitable for gravity applications)



**DIESEL NOZZLE AUTO HI-FLO**  
**120 LPM**  
**L-ANHF**

- 1" BSP (F) inlet
- 30mm O.D. spout
- Up to 120 LPM Flow rate (not suitable for gravity applications)



**ADBLUE/DEF POLY AUTO NOZZLE**  
**L-PAN**

- Automatic shut-off nozzle
- Suitable for UREA/ AdBlue/DEF fluids
- 3/4" swivel hose tail inlet
- Max Flow rate: 45 LPM



**ADBLUE/DEF STAINLESS STEEL NOZZLE**  
**L-SSANM**

- Automatic shut-off nozzle
- Suitable for UREA/ AdBlue/DEF fluids
- 3/4" swivel hose tail inlet
- 19mm O.D. spout
- Up to 60 LPM Flow rate



**DIESEL NOZZLE AUTO SLIM PROFILE**  
**60 LPM**  
**L-SFNAD60**

- Fuel Type : Diesel and Kerosene
- 3/4" BSPT (F) inlet
- 15/16" O.D. spout
- 0 - 60 LPM Flow rate



**DIESEL NOZZLE AUTO SLIM PROFILE**  
**120 LPM**  
**L-SFNAD120**

- Fuel Type : Diesel and Kerosene
- 1" BSPP (F) inlet
- 31 mm O.D. spout
- 0 - 120 LPM Flow rate



**DIESEL AUTO METERED NOZZLE**  
**120LPM**  
**L-FNAD120M**

- Fuel Type : Diesel and Kerosene
- Integrated Digital Meter
- 1" BSPP (F) inlet
- 30mm O.D. spout
- 10 - 120 LPM Flow rate



**UREA/DEF METERED AUTO NOZZLE**  
**L-PANM**

- Integrated Digital Meter
- 19mm inlet with barb
- 19 mm O.D. spout
- 2 position Trigger Lock
- 5 - 30 LPM Flow rate



**ADBLUE/DEF POLY MANUAL NOZZLE**  
**L-PMN**

- 19mm Barb inlet
- 19mm O.D. spout
- Suitable for pump and gravity applications
- 20 - 60 LPM Flow rate

**12**  
MONTHS  
MACNAUGHT  
WARRANTY

**lubemate**  
by macnaught

# BOP

BATTERY OPERATED PUMP



GOOD DESIGN AWARD® WINNER



2 YEARS MAINTENANCE WARRANTY



## STARTER KITS

Description	BOP 20L	BOP 60/205L	BOP 60/205L DEF/Urea#
Part Number	BP20S-UNA	BP205S-UNA	BP205S-DUNA
Modular Power Head	✓	✓	✓
Rechargeable Battery	2.0 AH Li-Ion	2.0 AH Li-Ion	2.0 AH Li-Ion
Cradle Charger	✓	✓	✓
Easy Control Dispensing Gun	✓	✓	✓
Reinforced Hose	1.5m	2m	2m
DEF/UREA Compatible	✗	✗	✓
Suction Tube	Zinc Plated Steel	Zinc Plated Steel	Stainless Steel
Bung Adaptor	Suits most 20L drums	Suits most 60/205L drums	Suits most 60/205L drums
Compatible Fluids	Suitable for Engine Oil, Gear Oil, Hydraulic Oil (oils up to SAE140 viscosity), Automatic Transmission Fluid (ATF) and Coolant		DEF/Urea (including compatible fluids for BOP20/60/205L)

\*Flush with water after using Urea/DEF to prevent crystallization.

## FLOW RATES

Type of Oil	Flow Rate*
Engine Oil	up to 4.5 LPM
High Vis Oil	up to 2.4 LPM
ATF	up to 6 LPM
Coolant	up to 6.2 LPM
DEF/Urea	up to 7 LPM

\* The delivery rates depend on the type, viscosity and the temperature of the fluid.  
 \*\*SAE40 at 20°C, SAE140 at 20°C

## BOP ACCESSORIES



\*Battery NOT included  
**POWER HEAD\*  
 BP20-PH**



**BOP INLINE METER  
 IM012EB-01**



**18V 2.0AH LI-ION BATTERY  
 BPB-20AH**



**BOP CHARGER  
 BPC-A**

## R-SERIES



### OIL DISPENSING SYSTEM 3:1 R-SERIES PUMP, METERED GUN OS100GE-01

- Kit supplied with R-Series 3:1 ratio pump, Metered oil control gun, 205 L Drum Trolley and Retractable Oil Reel 1/2" x 15m
- Includes all hoses and fittings



\*This model displays the kit with a R-Series Stub Pump, but will come with the T-Series Stub Pump above. For OS900 models.



### IBC OIL DISPENSING SYSTEM 5:1 R-SERIES PUMP, METERED GUN OS950GE-01

- Solid hot-dip galvanised base frame
- R500S-01 heavy-duty air-operated oil pump
- Heavy-duty, twin-pedestal oil reel - 1/2" x 15m hose
- HG20R-012E-01 metered oil control gun & holster
- Includes all hoses and fittings



### MULTI-PURPOSE GEAR OIL PUMP C7-01

- Compatible fluids - kerosene, two stroke mix, lubricating oils up to SAE140
- Pump output: 100 ml/stroke
- Compatible with most drum sizes from 15-25L
- 1.8m hose and manual non drip nozzle



### ALL PURPOSE OIL TRANSFER PUMP MAOP2

- Delivers up to 75 ml/stroke, viscosity dependant
- Suits 15-25L containers
- Suction Tube Extender
- Additional bung adaptors



### MECHANICAL OIL INLINE METER IM012KMM-01

- Maximum pressure 6,895 kPa (1000 psi)
- Accuracy (Flow Rate): +/-1% (lube oils)
- Compatible Fluids: Oils up to SAE140



### OIL CONTROL GUN, ELECTRONIC RIGID EXTENSION AND AUTO NOZZLE HG20R-012E-01

- Flow rate up to 30 LPM
- 1/2" BSP (F) inlet swivel
- Accuracy up to +/- 0.5% of reading
- Maximum pressure 6,900 kPa (1,000 psi)



### OIL CONTROL GUN, ELECTRONIC FLEXIBLE EXTENSION AND AUTO NOZZLE HG20F-012E-01

- Flow rate up to 30 LPM
- 1/2" BSP (F) inlet swivel
- Accuracy up to +/- 0.5% of reading
- Maximum pressure 6,900 kPa (1,000 psi)



### DIGITAL OIL GUN WITH FLEX EXT AND AUTO NOZZLE L-DOGFA

- Flow rate up to 35 LPM
- 1/2" BSP inlet
- Fitted with digital meter
- Max pressure up to 5,000 kPa (725 psi)

**lubemate**  
by macnaught



**FLEXIGUN® 450G GREASE GUN**

**K29-01**

- Delivery pressure up to 68,900 kPa (10,000 psi)
- Up to 0.68g per shot
- Maximum viscosity - Up to NLGI2
- Supplied with 300mm flexible extension and KY coupler

**10 YEARS**  
MACNAUGHT WARRANTY



**LEVERGUN® 450G GREASE GUN**

**K45-01**

- Delivery pressure up to 82,750 kPa (12,000 psi)
- Up to 1.5g per shot
- Maximum viscosity - Up to NLGI 2
- Supplied with 150mm steel extension and KY coupler

**10 YEARS**  
MACNAUGHT WARRANTY



**POWER GUN BATTERY OPERATED GREASE GUN**

**PG450**

- Dispense up to 12x grease cartridges per charge free flow
- 2x 18V 3.0Ah Lithium-ion Rechargeable Battery Packs and charger
- Supplied with 1m long flexible extension and KY Supergrip coupler

**2 YEARS**  
MACNAUGHT WARRANTY



**MINILUBE® GREASING SYSTEM**

**K7-01**

- Provides up to 30 shots of grease with each prime
- Maximum viscosity - Up to NLGI 2
- Suitable for 2.5kg containers
- KR gun delivers up to 10,000 psi on the high pressure setting

**10 YEARS**  
MACNAUGHT WARRANTY



**P3 POWERLUBE™ 20KG GREASE KIT**

**P3-01C**

- 50:1 Ratio Pump
- KY Supergrip coupler
- ZSB high pressure swivel
- Supplied with Pump, lid, follower, 4m high pressure grease hose and B2 Booster gun
- Suitable for 15 -20kg containers

**10 YEARS**  
MACNAUGHT WARRANTY



**PORTABLE GREASE TRANSFER PUMP**

**J3-01**

- Height adjustable pump
- Rubber edge follower plate and lid
- Rigid extension
- Suitable for bulk filling
- J3-Hose available
- Suitable for 18 -20kg containers

**10 YEARS**  
MACNAUGHT WARRANTY



**METRIC KIT 101 PCS**

**L-NP101M**

**12 MONTHS**  
MACNAUGHT WARRANTY



**AGRICULTURAL KIT 110 PCS**

**L-NP110AG**

- Head profile as per SAE J534/DIN 71412\* (\*for metric fittings only)
- Heat Treated greasing end
- Zinc plating exceeds ASTM B117

**12 MONTHS**  
MACNAUGHT WARRANTY



**GREASE INJECTOR NEEDLE KIN**



**NEEDLEPOINT GREASE COUPLER STRAIGHT (110MM) KZDXL**



**GREASE FITTING UNBLOCKER GFU**

- Clears clogged grease nipples



**SUCTION GUN 500ML C16-01**

- Pump output 500 ml/stroke
- 300ml Long delivery tube

**KY+ SAFETY GREASE COUPLERS**

- Compact Design
- Quick & Easy Release Mechanism
- Internal Pressure Relief
- Original KY Floating Jaw
- Superior Safety



PART NUMBER	DESCRIPTION	THREAD TYPE
KYPLUS-01	KYPLUS Grease Coupler - BSP	1/8" BSP
KYPLUS-02	KYPLUS Grease Coupler - NPT	1/8" NPT
KYPLUS-03	KYPLUS Grease Coupler - M10X1	M10X1 (F)
KYPLUSXL-01	KYPLUSXL Long Grease Coupler - BSP	1/8" BSP
KYPLUSXL-02	KYPLUSXL Long Grease Coupler - NPT	1/8" NPT
KYPLUSXL-03	KYPLUSXL Long Grease Coupler - M10X1	M10X1 (F)

**KY SUPERGRIP™ GREASE COUPLER**

- Standard SUPERGRIP™ coupler supplied with all Macnaught grease guns.
- Designed to fit most grease nipples and grease guns.




PART NUMBER	DESCRIPTION	THREAD TYPE
KY	SUPERGRIP™ Grease Coupler - BSP	1/8" BSP
KY-10	SUPERGRIP™ Grease Coupler - 10 Pack	1/8" BSP
KY-50	SUPERGRIP™ Grease Coupler - 50 Pack	1/8" BSP
KY-N	SUPERGRIP™ Grease Coupler - NPT	1/8" NPT
KY-M	SUPERGRIP™ Grease Coupler - M10X1	M10X1 (F)

**lubemate**  
by macnaught

**QUICK RELEASE GREASE COUPLER**

- Compact Size
- Four Jaw Design
- Unique Lever Design
- Extra Long Size

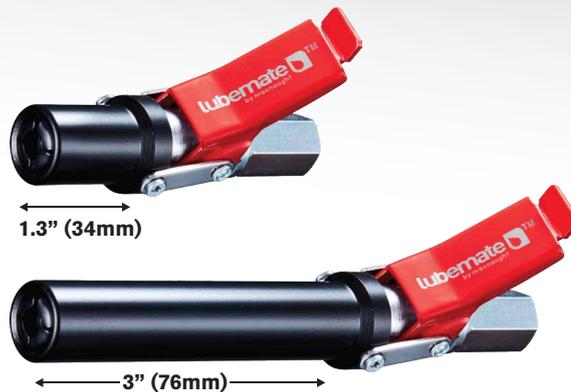

PART NUMBER	DESCRIPTION	THREAD TYPE
L-QRC	Quick Release Grease Coupler - BSP	1/8" BSP
L-QRC-02	Quick Release Grease Coupler - NPT	1/8" NPT
L-QRC-03	Quick Release Grease Coupler - M10X1	M10X1 (F)
L-QRCXL	Quick Release Long Grease Coupler XL - BSP	1/8" BSP



## R3 Series

- UV Stabilised & Impact resistant poly case
- Designed and Manufactured in Australia
- ProGlide high wear resistant mouth
- Advanced Spring Technology
- 180° Galvanised Steel swivel mounting bracket
- Light weight & easy to handle

R3 SERIES HOSE REELS



### COMPRESSED AIR REEL

- **AR415R-01** 1/2" x 15m
- **AR415B-01** 1/2" x 15m
- **AR420R-01** 1/2" x 20m
- **AR420B-01** 1/2" x 20m

- Max Working Pressure 275 psi
- Reinforced PVC Hose



### COMPRESSED AIR REEL

- **AR320R-01** 3/8" x 20m
- **AR320B-01** 3/8" x 20m

- Max Working Pressure 275 psi
- Reinforced PVC Hose



### COMPRESSED AIR/WATER REEL

- **AW315B-01** 3/8" x 15m
- **AW315K-01** 3/8" x 15m
- **AW320B-01** 3/8" x 20m
- **AW320K-01** 3/8" x 20m
- **AW415B-01** 1/2" x 15m
- **AW415K-01** 1/2" x 15m
- **AW420B-01** 1/2" x 20m
- **AW420K-01** 1/2" x 20m

- Max Working Pressure 250 psi
- Hybrid Polymer Hose



### GARDEN REEL

- **DR425D-03** 1/2" x 25m
- **DR425P-03** 1/2" x 25m
- **DR425G-03** 1/2" x 25m
- **DR425K-03** 1/2" x 25m

- Includes a trigger nozzle with 7 adjustable spray patterns
- Max Working Pressure 150 psi
- RetractaFLEX Hybrid Polymer Hose
- 2m Feeder hose and fittings



### AGRICULTURE CHEMICAL REEL

- **WD316R-01** 3/8" x 16m

- Max Working Pressure 250 psi
- Chem Resistant PVC Hose



### OIL REEL

- **OMP415K-01** 1/2" x 15m

- Wire reinforced rubber (SAE 100R17) hose
- Maximum pressure 1000 psi for reliability and performance



### GREASE REEL

- **GR215K-01** 1/4" x 15m

- High tensile steel braid reinforced rubber (SAE 100R2) hose
- Max Working Pressure 5000 psi



### OXY/LPG REEL

- **OG215K-04** Twin 3/16" x 15m

- Hybrid Twin gas hose made from reinforced rubber compliant to AS 1335
- Max Working Pressure 175 psi



### OXYACETYLENE REEL

- **OA215K-04** Twin 3/16" x 15m

- Hybrid Twin gas hose made from reinforced rubber compliant to AS 1335
- Max Working Pressure 175 psi



### LPG REEL

- **LPG220K-04** 3/16" x 20m

- Gas hose made from reinforced rubber compliant to AS 1335
- Max Working Pressure 200 psi

# C1 Series

Designed and tested by Macnaught to Retracta standards, the new C1 Series brings you a Retracta for smaller spaces. The new range of C1 Series Hose Reels, Barrier Reels, and Electrical Cable Reels are 35% smaller than the R3 Series and are ideal for small spaces and compact applications.



C1 SERIES REELS



## COMPRESSED AIR/ WATER REEL

**C1AW315B-01CB**

3/8" x 15m

**C1AW412B-01CC**

1/2" x 12m

- Hybrid polymer hose for the ultimate flexibility, to lay flat and prevent tangles or kinking under pressure
- Working pressure 250 psi
- Max Temperature 60°C



## HOT/COLD WATER REEL

**C1HC412R-01DD**

1/2" x 12m

**C1HC412R-01DD-SG**

1/2" x 12m

- High Temperature Hybrid Polymer hose rated to 80°C
- C1HC412R-01DD-SG includes Hot Water Trigger Nozzle
- Working pressure 300 psi
- Max Temperature 80°C



## GARDEN REEL

**C1DR412D-03DD**

1/2" x 12m

- Hybrid polymer hose for the ultimate flexibility, to lay flat and prevent tangles or kinking under pressure
- Garden reels include a Trigger Nozzle with 7 adjustable spray patterns
- Working pressure 150 psi



## WEEDICIDE/ PESTICIDE REEL

**C1WD315R-01CB**

3/8" x 15m

- Chemical resistant PVC hose for high durability
- Working pressure 300 psi
- Max Temperature 60°C



## BARRIER REELS

**C1BRW5025Y**

Red/White Tape

**C1BYB5025Y**

Yellow/Black Tape

- 25 metre tape length for larger barriers
- Tape Lock Off function to maintain barrier tape tension
- Magnetic tape anchor point
- Material - Woven Tape
- 48mm x 25m Tape

DANGER

CAUTION



## ELECTRICAL CABLE REELS


**C1EC10A20D-AU**

10A x 20m

**C1EC15A20D-AU**

15A x 20m

- Automatic spring rewind
- Thermal overload protection
- 1.5 metre feed cable
- SAA: AS/NZS 3105 Compliant

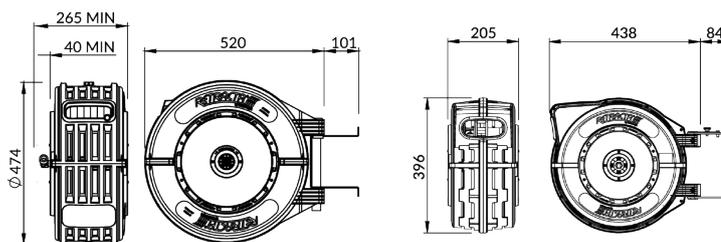

R3 SERIES

C1 SERIES

**35%  
SMALLER  
IN SIZE**

**RETRACTA  
SIZE GUIDE**

M-SERIES



**TWIN PEDESTAL DIESEL REEL**

**MDTP2510-01** 1" x 10m  
**MDTP2520-01** 1" x 20m

- Operating pressure up to 3,500 kPa (500 psi)
- Maximum operating temperature 60°C
- Wire braided rubber hose



**DIESEL REEL WITH AUTO NOZZLE**

**MDTP2520-01-AN** 1" x 20m

- Automatic shut-off fuel nozzle for diesel 30mm O.D. spout
- Hi-Flo up to 120 L/min flow rate
- NOTE: Automatic nozzle maximum working pressure 50 psi



**TWIN PEDESTAL AIR/WATER REEL**

**MATP1220-01** 1/2" x 20m  
**MATP1920-01** 3/4" x 20m

- Operating pressure up to 2,100 kPa (300 psi)
- Maximum operating temperature 60°C
- Synthetic rubber hose

STAINLESS STEEL SERIES



**RETRACTA AIR/WATER HOSE REELS**

**FMATP1220-01-SS** 1/2" x 20m  
**FMATP1920-01-SS** 3/4" x 20m  
**FMATP2520-01-SS** 1" x 20m

- Heavy Duty Stainless Steel 304 construction
- Twin pedestal for strength and stability
- External enclosed spring for safety and serviceability

lubemate by macnaught



**DIESEL REEL WITH AUTO NOZZLE**

**L-OTP1920-AN**

- 3/4" x 20m Hose
- Automatic shut-off fuel nozzle for diesel 15/16" O.D. spout
- 60 LPM flow rate
- Automatic nozzle pressure rating - 50 psi



**HEAVY DUTY DIESEL/AIR/WATER HOSE REEL**

**L-DTP2515**

- 25mm x 15m Hose
- Corrosion-resistant, powder-coated finish
- Compact Narrow design
- Pressure rating - 290 psi



**DIESEL REEL WITH AUTO NOZZLE**

**L-DTP2515-AN**

- 1" x 15m Hose
- Automatic shut-off fuel nozzle for diesel 30mm O.D. spout
- Hi-Flo up to 120 LPM flow rate
- Automatic nozzle pressure rating - 50 psi

H-SERIES

**COMPOSITE CONSTRUCTION UREA REEL**

**HAB1908-01**



- 3/4" x 8m Urea hose
- Hybrid spring rewind reel
- Inlet / Outlet: 3/4" BSPT (F) / 3/4" BSPT (M)
- Operating pressure up to 200 psi
- ABS drum



AU Customer Service  
**1800 185 102**

orders@macnaught.com.au



NZ Customer Service  
**0800 023 510**

nzorders@macnaught.com.au



SCAN FOR MORE INFORMATION