



AGRICULTURE SOLUTIONS

HEAVY DUTY POLY DIESEL TANKS

Designed to withstand the harshest conditions, these strong, lightweight tanks are built with safety features and reliable premium quality diesel pumps to give you peace of mind when refueling is required.

- 12V Self Priming Electric pump kit
- Built-in suction hose
- Automatic nozzle
- Lockable lid for security
- Internal suction line strainer fitted
- 30 minute duty cycle
- Moulded carry handles (Only models MDTN400L & MDT300L)



POLY DIESEL TANKS - 40 LPM

- 100L, 200L, 300L, 400L, N400L and 600L storage tank capacity
- Equipped with premium quality 12V electric diesel pump kit
- Delivers flow rate of up to 40 LPM
- 3/4" x 4m delivery hose
- Anti-static hose

PART NUMBER	CAPACITY	FLOW RATE	DIMENSIONS	TANK NET WEIGHT
MDT100L	100L	40 LPM	800L x 680W x 465H	30 KG
MDT200L	200L	40 LPM	800L x 680W x 710H	36 KG
MDT300L	300L	40 LPM	1290L x 600W x 770H	42 KG
MDT400L	400L	40 LPM	1150L x 820W x 780H	45 KG
MDTN400L	400L	40 LPM	1290L x 600W x 965H	45 KG
MDT600L	600L	40 LPM	1700L x 880W x 740H	65 KG

POLY DIESEL TANKS - 60 LPM

- 800L, 1000L and 1200L storage tank capacity
- Equipped with premium quality 12V high flow electric diesel pump kit
- Delivers flow rate of up to 60 LPM
- 1" x 4m delivery hose
- Anti-static hose
- Earthing cable

PART NUMBER	CAPACITY	FLOW RATE	DIMENSIONS	TANK NET WEIGHT
MDT800L-60LPM	800L	60 LPM	1700L x 1000W x 860H	85 KG
MDT1000L-60LPM	1000L	60 LPM	1700L x 1000W x 1025H	95 KG
MDT1200L-60LPM	1200L	60 LPM	1700L x 1000W x 1190H	99 KG



POLY DIESEL TANKS - 85 LPM

- 800L, 1000L and 1200L storage tank capacity
- Baffles included on 1000L & 1200L models
- Equipped with premium quality 12V high flow electric diesel pump kit
- Delivers flow rate of up to 85 LPM
- 1" x 4m delivery hose
- Anti-static hose
- Earthing cable

PART NUMBER	CAPACITY	FLOW RATE	DIMENSIONS	TANK NET WEIGHT
MDT800L	800L	85 LPM	1700L x 1000W x 860H	85 KG
MDT1000L	1000L	85 LPM	1700L x 1000W x 1025H	95 KG
MDT1200L	1200L	85 LPM	1700L x 1000W x 1190H	99 KG

Applications:

Ideal addition to the back of a Service truck, Ute or portable diesel fuel system.

POLY TANKS FOR DIESEL AND ADBLUE/DEF lubemate

The range of Poly Diesel tanks from Lubemate are the economical alternative for your diesel transport and dispensing requirements. Constructed from durable, high-density rotomolded polyethylene.

- 12V electric pump,
- Built-in suction hose
- Auto-shut-off dispense nozzle
- 3/4" x 4m of delivery hose
- Internal suction strainer fitted
- 30 minute duty cycle
- Lockable lid for security
- Level gauge included

TANK
3
YEARS
MACNAUGHT
WARRANTY™

PUMP
12
MONTHS
MACNAUGHT
WARRANTY™

FUEL EQUIPMENT



L-PDT200

L-PDT400

POLY DIESEL TANKS - 40 LPM

- 200L, 400L storage tank capacity
- Delivers flow rate up to 40 LPM
- Anti-static hose

PART NUMBER	CAPACITY	FLOW RATE	DIMENSIONS	TANK NET WEIGHT
L-PDT200	200L	40 LPM	1100L x 640W x 610H	35 KG
L-PDT400	400L	40 LPM	1150L x 800W x 680H	53 KG

ADBLUE/DEF TANKS

- 200L AdBlue/DEF Tank
- 330/50L combo tank that can be used for both diesel and AdBlue

PART NUMBER	CAPACITY	FLOW RATE	DIMENSIONS	TANK NET WEIGHT
L-PABT200	200L ADBLUE/DEF	26 LPM	1100L x 640W x 610H	35 KG
L-PCT33050	330/50L DIESEL & ADBLUE COMBO	40/17 LPM	1150L x 800W x 680H	68 KG



L-PCT33050

L-PABT200

DURABILITY COMES STANDARD

MACNAUGHT TANKS



SPARE PARTS &
PUMPS AVAILABLE

PUMPS & PUMP KITS



12V ELECTRIC DIESEL PUMP KIT - 40 LPM AFP12A

- Flow rate up to 40 LPM
- Suitable for diesel use only
- 12V or 24V options available
- Supplied with 4m long delivery hose, 2m long suction hose and fittings



12V ELECTRIC DIESEL PUMP - 60 LPM ADP12A-60LP

- Flow rate of 60 LPM
- Suitable for diesel use only
- 30min Duty cycle
- 12V DC Electric diesel pump



12V ELECTRIC DIESEL PUMP KIT - 60 LPM ADP12A

- Flow rate of 60 LPM
- Suitable for diesel use only
- 30min Duty cycle
- 12V DC Electric diesel pump



Kit contains:

- 12V 60 LPM Diesel pump - ADP12A-60LP
- 25mm x 4m Delivery hose
- 25mm x 1.2m Suction hose
- 1" Automatic hi-flow diesel nozzle
- 1 x Strainer, 2 x Swivels, 1 x Elbow

*Not suitable for MDT 100-600L tanks



ELECTRIC DIESEL PUMP KIT - 85 LPM AHFP85L-12A

- Suitable for Diesel use only
- Flow rate up to 85 LPM
- Inlet/Outlet: 1" BSP (F)
- Supplied with 4m long delivery hose, 2m long suction hose and fittings



RAPIDFLO ROTARY FUEL PUMP GT-01

- Suitable for 60 - 205 L drums
- Delivers 800ml per revolution (Up to 100 LPM)
- 2.4m anti-static rubber delivery hose
- Suitable for Diesel, ULP, Kerosene, Aviation fluids and lubricating oils up to SAE30



ROTARY VANE PUMP RVP-01

- Suits both 205 & 60 L drums via sliding bung adaptor
- Delivers up to 20 LPM (in both directions)
- Suitable for Diesel, Kerosene and oils up to SAE90



240V DIESEL MINI BOWSER - 60 LPM AMB60L

- Suitable for Diesel use only
- Flow rate up to 60 LPM
- Inlet/Outlet: 1" BSP(F)
- 30-minute duty cycle



240V DIESEL MINI BOWSER - 100 LPM AMB100L

- Suitable for Diesel use only
- Flow rate up to 100 LPM
- Inlet/Outlet: 1" BSP(F)
- Supplied with 4m long delivery hose and automatic nozzle



**DIESEL INLINE METER
ADTFM-2**

- Digital Turbine Meter for low viscosity fluids, easy to install inline or end of line applications.
- Bi-directional: Either port can be used for Inlet or Outlet
- Flow Rate: 4 LPM - 120 LPM
- Working Temperature Range -20°C to 70°C
- Maximum working pressure 150 psi
- Suitable for diesel use only



USE WITH MACNAUGHT 100L TO 1200L POLY DIESEL TANKS, COMES WITH NECESSARY ADAPTORS



**DIGITAL DIESEL METER
ADTFM**

- Flow rate 10 - 150 LPM
- Suitable for diesel, kerosene and coolants
- Operating pressure up to 345 kPa (50 psi)
- Inlet/Outlet: 1" BSP



**MECHANICAL FUEL METER
DM100-01**

- Operating pressure up to 345 kPa (50 psi)
- Accuracy around +/- 1.0% of reading
- Flow range between 3-80 LPM
- Suitable for Diesel, ULP, Kerosene and light oils



**FUEL NOZZLE
MANUAL ULP 45 LPM
L-FNMU**

- 3/4" BSP (F) inlet
- 13/16" O.D. spout
- Suitable for ULP
- Up to 45 LPM flow rate (not suitable for gravity applications)



**DIESEL NOZZLE
AUTO HI-FLO 120 LPM
L-ANHF**

- 1" BSP (F) inlet
- 30mm O.D. spout
- Up to 120 LPM flow rate (not suitable for gravity applications)



**FUEL NOZZLE
AUTO ULP 45 LPM
L-FNAU**

- ULP automatic shut off nozzle
- 3/4" BSP (F) inlet
- 13/16" O.D. spout
- Up to 45 LPM flow rate (not suitable for gravity applications)



**CHEMICAL
ROTARY PUMP
L-MACP200**

- Suitable for transferring mineral oils, acids, alkalis, alcohols, diesel, coolants, water-based chemicals and clean or salt waters. AdBlue/DEF compatible (check compatibility)
- Suitable for 60 L or 205 L containers



**240V AUTO MINI
BOWSER PUMP
ASSEMBLE
L-HMBA240V**

- This 240V AUTO DIESEL MINI BOWSER UNIT is a complete package for the safe, economical and efficient delivery of diesel.
- The pump contained in the unit delivers up to 80 LPM free flow.



TRANSPORTABLE CADDY



TRANSPORTABLE 75L CADDY TC75-01

Your **All-in-One** solution for fluid mobility.

The Macnaught Transportable 75L Caddy allows you to dispense diesel, oil and AdBlue/DEF with ease, thanks to its rugged construction and user - friendly design.

- Suitable to use with Diesel, Oil, AdBlue/DEF and Anti-freeze.
- 2" BSP(F) centre hole to mount pump with 2" BSP male thread and separate filler hole with breather cap.
- Supplied with pump retainer clip for manual pump.
- Also, compatible to use with Battery Operated Pump (BOP) and manual hand pump.
- UV Stabilised
- Not suitable with petrol



Applications:

Suitable to use across most industries where the transfer of diesel, oil and AdBlue/DEF is required.

RECOMMENDED AND TESTED TO USE WITH*

OIL

BATTERY OPERATED PUMP STARTER KIT BP60S-UNA

- Fulfil oil related tasks around the workshop when used with caddy
- Provides mobility with ease
- Workshop stays clean - No Spills
- For use with Engine Oil, Gear Oil, Hydraulic Oil, ATF and coolant
- Use 60L Stem Kit (BP60X-UNA) for existing BOP users



DIESEL

ROTARY VANE PUMP L-RPH

- Self-priming and dual direction operation
- Provides mobility with ease
- Use to fill up diesel into vehicles or in small farm equipment
- For use with diesel, kerosene and mineral oils up to SAE 90



ANTIFREEZE / ADBLUE / DEF

STAINLESS STEEL ROTARY VANE PUMP L-SSRP

- Stainless Steel rotor with PTFE vanes and seals
- Use to fill and top-up AdBlue in the diesel vehicles



*Pumps recommended above are to be purchased separately.

BOP

BATTERY OPERATED PUMP

BATTERY OPERATED PUMP 20L STARTER KIT BP20S-UNA

- Pump stem, Power Head, Hose and gun assembly, battery pack and charger included in starter kit

BATTERY OPERATED PUMP 20L STEM KIT BP20X-UNA

- Pump Stem, Hose and gun assembly only

Easy Portable Power Head

Lithium-ion Battery and Charger

Drainback Adapter

New Modular Concept

Adjustable Suction Tube



BOP Meter
Optional Extra

Easy Control
Dispensing Gun

1.5m Hose

Suitable for Oils up to SAE140, ATF and Coolant



* BOP Inline Meter sold separately, not included in BOP 20L Starter kit



BP20-PH
Powerhead
To suit pump stems. Battery NOT included.



IM012EB-01
BOP inline meter



BPB-20AH
18VDC-2.0AH
Li-ion battery



BPC-A
BOP Charger suited for 2.0AH Battery (Available for other countries - USA, UK, Europe)



MULTI-PURPOSE GEAR OIL PUMP C7-01

- Compatible fluids - kerosene, two stroke mix, lubricating oils up to SAE140
- Pump output: 100 ml/stroke
- Compatible with most drum sizes from 15 -25 L



ALL PURPOSE OIL TRANSFER PUMP MAOP20

- Easy to prime pump
- Additional bung adaptors
- Suction Tube Extender
- Delivers up to 75 ml/stroke, viscosity dependant
- Suits 15-25 L containers



OIL CONTROL GUN, ELECTRONIC RIGID EXTENSION HG20R-012E-01

- Flow rate up to 30 LPM
- 1/2" BSP(F) inlet swivel
- Accuracy up to +/- 0.5% of reading
- Maximum pressure 6,900kPa (1,000 psi)



OIL CONTROL GUN, ELECTRONIC FLEXIBLE EXTENSION HG20F-012E-01

- Flow rate up to 30 LPM
- 1/2" BSP(F) inlet swivel
- Accuracy up to +/- 0.5% of reading
- Maximum pressure 6,900kPa (1,000 psi)



MECHANICAL OIL INLINE METER IM012KMM-01

- Maximum pressure 6,895 kPa (1000 psi)
- Accuracy (Flow Rate): +/- 1% (lube oils)
- Compatible Fluids: Oils up to SAE140



DIGITAL OIL GUN WITH FLEX EXT AND AUTO NOZZLE L-DOGFA

- Fitted with digital meter
- Max pressure up to 5,000 kPa (725 psi)
- Flow rate up to 35 LPM
- 1/2" BSP inlet
- Automatic non-drip nozzle



lubemate
by macnaught



POWER GUN BATTERY OPERATED GREASE GUN
PG450

- Dispense up to 12x grease cartridges per charge free flow
- 2x 18V 3.0Ah Lithium-ion Rechargeable Battery Packs and charger
- Supplied with 1m long flexible extension and KY Supergrip coupler



FLEXIGUN® 450G GREASE GUN
K29-01

- Delivery pressure up to 68,900 kPa (10,000 psi)
- Up to 0.68g per shot
- Maximum viscosity - Up to NLGI2
- Supplied with 300mm flexible extension and KY coupler



LEVERGUN® 450G GREASE GUN
K45-01

- Delivery pressure up to 82,750 kPa (12,000 psi)
- Up to 1.5g per shot
- Maximum viscosity - Up to NLGI 2
- Supplied with 150mm steel extension and KY coupler



P3 POWERLUBE™ 20KG GREASE KIT
P3-01C

- 50:1 Ratio Pump
- KY Supergrip coupler
- ZSB high pressure swivel
- Supplied with Pump, lid, follower, 4m high pressure grease hose and B2 Booster gun



PORTABLE GREASE TRANSFER PUMP
J3-01

- Height adjustable pump
- Rubber edge follower plate and lid
- Rigid extension
- Suitable for bulk filling
- J3-Hose available



MINILUBE® GREASING SYSTEM
K7-01

- Provides up to 30 shots of grease with each prime
- Maximum viscosity - Up to NLGI 2
- Suitable for 2.5kg containers



FLEXIBLE GREASING EXTENSION 12" & 17"
KF9 / KF17

- 1/8" BSP(M) fittings on both ends
- Suitable for both hand or powered greasing equipment



GREASE INJECTOR NEEDLE
KIN



GREASE FITTING UNBLOCKER
GFU

- Clears clogged grease nipples



NEEDLEPOINT GREASE COUPLER STRAIGHT (110MM)
KZDXL



SUCTION GUN 500ML
C16-01

- Pump output 500 ml/stroke
- 300 ml Long delivery tube

KY+ SAFETY GREASE COUPLERS

- Compact Design
- Quick & Easy Release Mechanism
- Internal Pressure Relief
- Original KY Floating Jaw
- Superior Safety



PART NUMBER	DESCRIPTION	THREAD TYPE
KYPLUS-01	KYPLUS Grease Coupler - BSP	1/8" BSP
KYPLUS-02	KYPLUS Grease Coupler - NPT	1/8" NPT
KYPLUS-03	KYPLUS Grease Coupler - M10X1	M10X1 (F)
KYPLUSXL-01	KYPLUSXL Long Grease Coupler - BSP	1/8" BSP
KYPLUSXL-02	KYPLUSXL Long Grease Coupler - NPT	1/8" NPT
KYPLUSXL-03	KYPLUSXL Long Grease Coupler - M10X1	M10X1 (F)

KY SUPERGRIP™ GREASE COUPLER

- Standard SUPERGRIP™ coupler supplied with all Macnaught grease guns.
- Designed to fit most grease nipples and grease guns.




PART NUMBER	DESCRIPTION	THREAD TYPE
KY	SUPERGRIP™ Grease Coupler - BSP	1/8" BSP
KY-10	SUPERGRIP™ Grease Coupler - 10 Pack	1/8" BSP
KY-50	SUPERGRIP™ Grease Coupler - 50 Pack	1/8" BSP
KY-N	SUPERGRIP™ Grease Coupler - NPT	1/8" NPT
KY-M	SUPERGRIP™ Grease Coupler - M10X1	M10X1 (F)

lubemate
by macnaught

QUICK RELEASE GREASE COUPLER

- Compact Size
- Four Jaw Design
- Unique Lever Design
- Extra Long Size

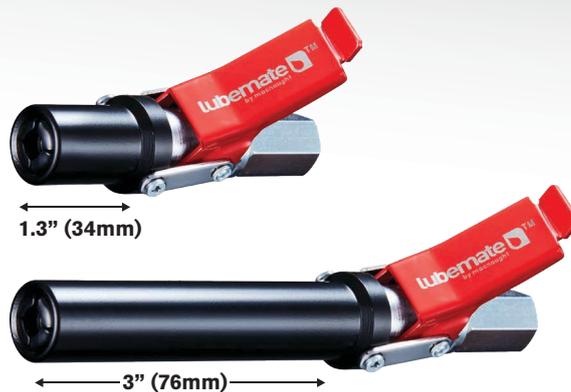

PART NUMBER	DESCRIPTION	THREAD TYPE
L-QRC	Quick Release Grease Coupler - BSP	1/8" BSP
L-QRC-02	Quick Release Grease Coupler - NPT	1/8" NPT
L-QRC-03	Quick Release Grease Coupler - M10X1	M10X1 (F)
L-QRCXL	Quick Release Long Grease Coupler XL - BSP	1/8" BSP

C1 Series

Designed and tested by Macnaught to Retracta standards, the new C1 Series brings you a Retracta for smaller spaces. The new range of C1 Series Hose Reels, Barrier Reels, and Electrical Cable Reels are 35% smaller than the R3 Series and are ideal for small spaces and compact applications.

35% Smaller than the R3 Series



COMPRESSED AIR/WATER

- Hybrid polymer hose for the ultimate flexibility, to lay flat and prevent tangles or kinking under pressure
- Working pressure 250 psi
- Hose Colour - Blue
- Case Colour - Blue

C1AW315B-01CB
10mm (3/8") x 15m
C1AW412B-01CC
12mm (1/2") x 12m



HOT/COLD WATER

- High Temperature Hybrid Polymer hose rated to 80°C
 - C1HC412R-01DD-SG includes Hot Water Trigger Nozzle
 - Working pressure 300 psi
 - Max Temperature 80°C
 - Hose Colour - Red
 - Case Colour - Red
- C1HC412R-01DD**
12mm (1/2") x 12m
C1HC412R-01DD-SG
12mm (1/2") x 12m



GARDEN

- Hybrid polymer hose for the ultimate flexibility, to lay flat and prevent tangles or kinking under pressure
- Garden reels include a Trigger Nozzle with 7 adjustable spray patterns
- Working pressure 150 psi
- Hose Colour - Green
- Case Colour - Dark Grey

C1DR412D-03DD
12mm (1/2") x 12m



WEEDICIDE/ PESTICIDE

- Chemical resistant PVC hose for high durability
 - Working pressure 300 psi
 - Hose Colour - Black
 - Case Colour - Red
- C1WD315R-01CB**
10mm (3/8") x 15m



BARRIER REELS

- 25 metre tape length for larger barriers
- Tape Lock Off function to maintain barrier tape tension
- Magnetic tape anchor point
- Case Colour - Yellow
- Material - Woven Tape
- 48mm x 25m Tape

C1BRW5025Y
Red/White Tape
C1BYB5025Y
Yellow/Black Tape

DANGER 
CAUTION 



ELECTRICAL CABLE REELS

- Automatic spring rewind
- Thermal overload protection
- 1.5 metre feed cable
- SAA: AS/NZS 3105 Compliant
- Cord Colour - Black
- Case Colour - Dark Grey

C1EC10A20D-AU
10A x 20m
C1EC15A20D-AU
15A x 20m



R3 Series

- UV stabilised & impact resistant poly case
- Designed and manufactured in Australia
- ProGlide high wear resistant mouth
- Advanced spring technology
- 180° Galvanised steel swivel mounting bracket
- Light weight & easy to handle



R3 SERIES HOSE REELS



COMPRESSED AIR REEL

- **AR415R-01** 1/2" x 15m
- **AR415B-01** 1/2" x 15m
- **AR420R-01** 1/2" x 20m
- **AR420B-01** 1/2" x 20m

- Compressed Air (Premium reinforced PVC)
- Inlet/Outlet - 3/8"/3/8" BSP
- Pressure Rating - 275 psi



COMPRESSED AIR REEL

- **AR320R-01** 3/8" x 20m
- **AR320B-01** 3/8" x 20m

- Compressed Air (Premium reinforced PVC)
- Inlet/Outlet - 3/8"/1/4" BSP
- Pressure Rating - 275 psi



COMPRESSED AIR/WATER REEL

- **AW315B-01** 3/8" x 15m
- **AW320B-01** 3/8" x 20m
- **AW415B-01** 1/2" x 15m
- **AW420B-01** 1/2" x 20m

- Compressed Air/Water
- Pressure Rating - 250 psi



GARDEN REEL

- **DR425D-03** 1/2" x 25m
- **DR425P-03** 1/2" x 25m
- **DR425G-03** 1/2" x 25m

- Garden/Horticultural
- Outlet - Hose connector
- Pressure Rating - 150 psi




AGRICULTURE CHEMICAL REEL

- **WD316R-01** 3/8" x 16m


- Inlet/Outlet - 3/8"/3/8" BSP
- Pressure Rating - 150 psi
- Hose Material - Chem resistant PVC



RETRACTA SIZE GUIDE

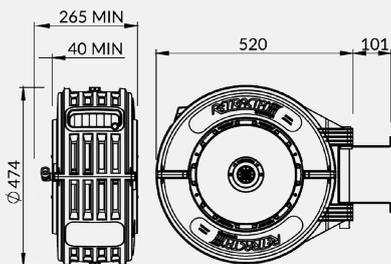

R3 SERIES

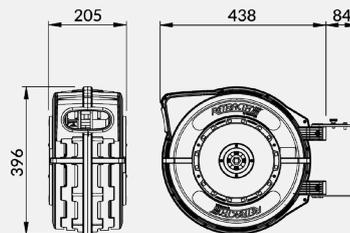

C1 SERIES

35% SMALLER IN SIZE

SCAN FOR MORE INFORMATION



M SERIES



TWIN PEDESTAL DIESEL REEL

MDTP2510-01 1" x 10m
MDTP2520-01 1" x 20m

- Operating pressure up to 3,500 kPa (500 psi)
- Maximum operating temperature 60°C
- Wire braided rubber hose



DIESEL REEL WITH AUTO NOZZLE

MDTP2520-01-AN 1" x 20m

- Automatic shut-off fuel nozzle for diesel 30mm o.d. spout
- Hi-Flo up to 120 L/min flow rate
- NOTE: Automatic nozzle maximum working pressure 50 psi



TWIN PEDESTAL AIR/WATER REEL

MATP1220-01 1/2" x 20m
MATP1920-01 3/4" x 20m

- Operating pressure up to 2,100 kPa (300 psi)
- Maximum operating temperature 60°C
- Synthetic rubber hose



STAINLESS STEEL SERIES



RETRACTA AIR/WATER HOSE REELS

FMATP1220-01-SS 1/2" x 20m
FMATP1920-01-SS 3/4" x 20m
FMATP2520-01-SS 1" x 20m

- Heavy Duty Stainless Steel 304 construction
- Twin pedestal for strength and stability
- External enclosed spring for safety and serviceability
- Fully serviceable



GET IN TOUCH



AU CUSTOMER SERVICE
1800 185 102
orders@macnaught.com.au



NZ CUSTOMER SERVICE
0800 023 510
nzorders@macnaught.com.au



Scan me for more information

CONNECT WITH US!



Find us on socials @macnaught

macnaught.com