

WHAT'S NEW IN LUBEMATE

QUICK RELEASE GREASE COUPLERS L-QRC, L-QRCXL, L-QRC-KIT2



The new Lubemate quick release couplers offer you the choice of a short or long nozzle to access a wider range of areas to lubricate more effectively. Both couplers include the hardened four jaw design which grips the grease nipple tighter, overall making the coupler more resilient under pressure. The unique red lever design makes uncoupling cleaner and effortless, allowing easier disconnection.

L-QRC

Four jaw design

Hardened jaws are resilient under high pressure.

Compact size

Measuring only 74mm x 30mm allows for use in small, tight spaces.



Unique lever design

Makes coupling and uncoupling effortless.


TECHNICAL SPECIFICATIONS

- ✓ Pressures up to 10,000psi
- ✓ 1/8" BSP (F) inlet
- ✓ Ultralight 85g only
- ✓ Hardened 4-jaws
- ✓ Compact size

L-QRCXL

Four jaw design

Hardened jaws are resilient under high pressure.

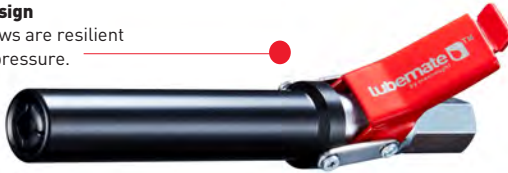

Unique lever design

Makes coupling and uncoupling effortless.

TECHNICAL SPECIFICATIONS

- ✓ Pressures up to 10,000psi
- ✓ 1/8" BSP (F) inlet
- ✓ Measuring 129mm x 30mm
- ✓ Hardened 4-jaws
- ✓ Suitable for all grease gun types - air operated, manual and battery powered

Extra long - 129mm in length
Extra length for accessing hard to reach grease nipples.



L-QRC-KIT2

The Lubemate Test Stand has been designed to display and test the ease of using the new Lubemate couplers. With capacity to hold 10 packaged couplers both small or large, the Test Stand is your ideal grease coupler working counter display.

HIGH FLOW OIL CONTROL GUN

L-HFOG, L-DHFOG



The new High Flow Oil Control Guns by Lubemate gives you the power to deliver oil faster to your application. Up to double the flow rate of most oil dispensing guns*, the High Flow Oil Control Gun (L-HFOG) comes standard with a flexible extension, or upgrade to the Metered High Flow Oil Control Gun (L-DHFOG) with digital meter and rigid extension. Both guns are made from high quality, aircraft-grade aluminum for maximum strength & durability to ensure you get the most from your Lubemate Product.

Flexible extension with auto nozzle

Designed for heavy-duty work conditions and auto nozzle avoids fluid spillage.

2 position latch mechanism

Allows control of flow rate in two positions.



L-HFOG

Compact and lightweight design

Made from aircraft grade aluminum for maximum strength and durability.

High flow capacity

Flow rates up to 80LPM.

TECHNICAL SPECIFICATIONS

- 3/4" BSP (F) inlet swivel
- Flexible extension with automatic nozzle
- Flow rate up to 80LPM
- Max pressure up to 10,000kPa (1,450psi)

RECOMMENDED USE WITH

- *Suitable for oils up to SAE 140, engine oils, gear oils, ATF, hydraulic oils and premixed coolants

INCLUDED IN THIS PACK


- High flow oil gun, flexible extension, auto nozzle and instruction manual.

Rigid extension with auto nozzle

Designed for heavy-duty work conditions and auto nozzle avoids fluid spillage.

2 position latch mechanism

Allows control of flow rate in two positions.

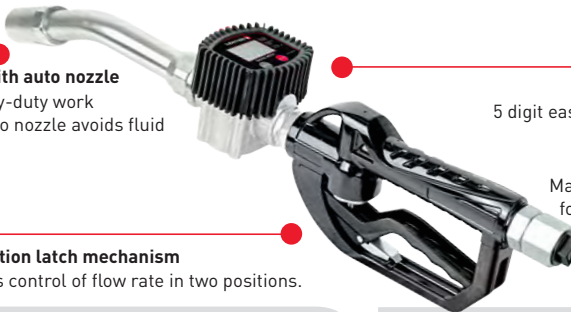

L-DHFOG

High accuracy digital oil meter

5 digit easy to read, resettable LCD display.

Compact and lightweight design

Made from aircraft grade aluminum for maximum strength & durability.

TECHNICAL SPECIFICATIONS

- 3/4" BSP (F) inlet swivel
- Rigid extension with automatic nozzle and digital oval gear meter
- Flow rate up to 80LPM
- Accuracy: +/- 0.5%
- Max pressure up to 5,000kPa (725psi)

RECOMMENDED USE WITH

- *Suitable for oils up to SAE 140, engine oils, gear oils, ATF, hydraulic oils and premixed coolants

INCLUDED IN THIS PACK

- High flow oil gun, rigid extension, digital oil meter, auto nozzle and instruction manual.

OIL CONTROL GUNS

L-OGFA, L-OGRM, L-DOGFA, L-DOGRM



The new Oil Control Guns from Lubemate are the perfect tools for fluid control in your workshop. The quality range includes metered and non-metered versions with flexible & rigid extensions to give you exactly what you need to control your workshop automotive fluids. With a 2 year limited Macnaught warranty, these Oil Control Guns are built for the toughest conditions to ensure you get the most out of your Lubemate products.

L-OGFA

L-OGRM



TECHNICAL SPECIFICATIONS

- 1/2" BSP (F) inlet
- Flow rate up to 35LPM
- Max pressure up to 10,000kPa (1450psi)

RECOMMENDED USE WITH

- Suitable for oils up to SAE140, engine oils, gear oils, ATF, hydraulic oils and premixed coolants

PRODUCT INCLUSIONS

- L-OGFA: Oil control gun, flexible extension, auto nozzle and instruction manual
- L-OGRM: Oil control gun, rigid extension, manual nozzle and instruction manual

L-DOGFA

L-DOGRM



TECHNICAL SPECIFICATIONS

- 1/2" BSP (F) inlet
- Flow rate up to 35LPM
- Max pressure up to 5,000kPa (725psi)
- Digital meter: 5 digit easy to read LCD display
- Accuracy: +/- 0.5%

RECOMMENDED USE WITH

- Suitable for oils up to SAE140, engine oils, gear oils, ATF, hydraulic oils and premixed coolants

PRODUCT INCLUSIONS

- L-DOGFA: Oil control gun, flexible extension, digital oil meter, 1 x 3V battery, auto nozzle and instruction manual
- L-DOGRM: Oil control gun, rigid extension, digital oil meter, 1 x 3V battery, manual nozzle and instruction manual

DIGITAL PRESET OIL CONTROL GUN

L-DPOCG



The new Digital Preset Oil Control Gun from Lubemate features an accurate 5 digit meter moulded directly into the gun. Robust and light weight, the L-DPOCG is ideal for any workshop requiring accurate volume delivery.

Flexible extension with auto nozzle

Easy access in tight spaces and auto nozzle to avoid fluid spillage with auto shut-off.

High accuracy digital oval gear oil meter

5 digit easy to read, resettable LCD display with an accuracy of +/- 0.5%.

Presettable oil gun

Offers 5 different dispense memory settings for common delivery volumes.

Robust & lightweight design

Ergonomic plastic shell with shockproof rubber & the trigger guard prevents accidental operation.



TECHNICAL SPECIFICATIONS

- Presettable auto shut-off gun with totaliser and batch counters
- 1/2" BSP (F) inlet swivel
- Flow range: 1-35LPM
- Digital meter: 5 digit easy to read LCD display
- Max pressure up to 6,900kPa (1,000psi)
- Accuracy: +/- 0.5%

RECOMMENDED USE WITH

- Suitable for oils up to SAE 140, engine oils, gear oils, ATF, hydraulic oils and premixed coolants

INCLUDED IN THIS PACK

- Digital preset oil gun, flexible extension, automatic nozzle, 1 x 9V battery and instruction manual

OIL CONTROL GUNS - ECONOMY

L-OCGAE, L-OCGME




The new Oil Control Guns from Lubemate have been designed to reliably dispense engine oil, gear oil, transmission fluid and premix automotive coolants.

L-OCGAE

Compact and lightweight design
aluminium die cast handle.

Continuous flow switch
lockable trigger.

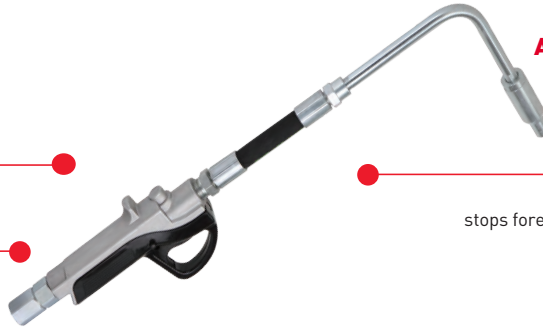

AUTO NOZZLE

Built-in strainer
stops foreign material from entering the gun.

TECHNICAL SPECIFICATIONS

- 1/2" BSP (F) inlet swivel
- Flexible extension with automatic nozzle
- Flow rates up to 30LPM
- Max pressure up to 6,900kPa (1,000psi)

RECOMMENDED USE WITH

- Suitable for oils up to SAE 140, engine oils, gear oils, ATF and hydraulic oils


INCLUDED IN THIS PACK

- Oil control gun, flexible extension, automatic nozzle and instruction manual

L-OCGME

Built-in strainer
stops foreign material from entering the gun.

Continuous flow switch
lockable trigger.

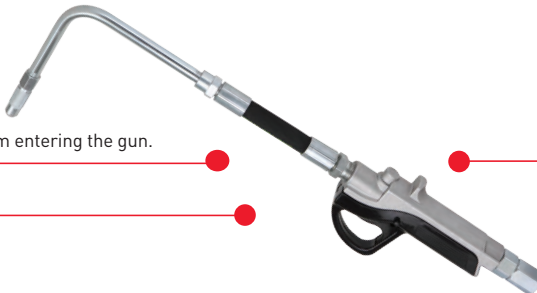

MANUAL NOZZLE

Compact and lightweight design
aluminium die cast handle.

TECHNICAL SPECIFICATIONS

- 1/2" BSP (F) inlet swivel
- Flexible extension with manual nozzle
- Flow rates up to 30LPM
- Max pressure up to 6,900kPa (1,000psi)

RECOMMENDED USE WITH

- Suitable for oils up to SAE 140, engine oils, gear oils, ATF and hydraulic oils

INCLUDED IN THIS PACK


- Oil control gun, flexible extension, manual nozzle and instruction manual

OIL BAR TAPS PUMP MOUNT

L-OBTPP, L-DOBTP



The new Oil Bar Taps from Lubemate offers you an easy to use, ergonomic alternative to hose dispensing. Both taps are made for heavy duty work with the inclusion of an accurate, 5 digit electronic oval gear meter fitted to the L-DOBTP model for easy reading & accountability. These meters can be mounted directly to pump outlet.

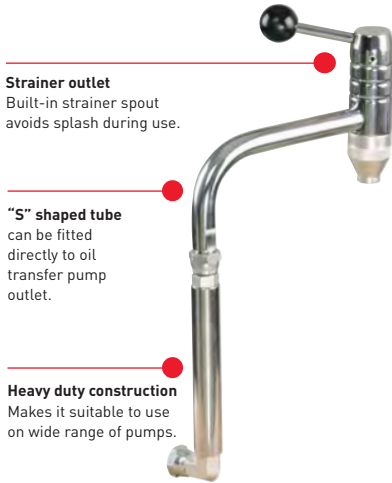

Strainer outlet

Built-in strainer spout avoids splash during use.

"S" shaped tube

can be fitted directly to oil transfer pump outlet.

Heavy duty construction

Makes it suitable to use on wide range of pumps.

L-OBTPP

(Oil Bar Tap without Meter)

TECHNICAL SPECIFICATIONS

- 1/2" BSP (F) inlet
- Flow rate up to 35LPM
- Max pressure up to 10,000kPa (1,500psi)

RECOMMENDED USE WITH

- Suitable for oils up to SAE140, engine oils, gear oils, ATF, hydraulic oils and premixed coolants

INCLUDED IN THIS PACK

- Oil dispensing tap, fittings & Instruction manual



Strainer outlet

Built-in strainer spout avoids splash during use.

"S" shaped tube

can be fitted directly to oil transfer pump outlet.

Heavy duty construction

Makes it suitable to use on wide range of pumps.

Accurate digital oil meter
5 digit easy to read, resettable LCD display.

L-DOBTP

(Oil Bar Tap with Meter)

TECHNICAL SPECIFICATIONS

- 1/2" BSP (F) inlet
- Flow range: 1- 35LPM
- Max pressure up to 10,000kPa (1,500psi)
- Digital oval gear meter: 5 digit easy to read LCD display
- Accuracy: +/- 0.5%

RECOMMENDED USE WITH

- Suitable for oils up to SAE140, engine oils, gear oils, ATF, hydraulic oils and premixed coolants

INCLUDED IN THIS PACK

- Oil dispensing tap, digital oil meter, 1 x 3.6v battery, fittings & instruction manual

DIGITAL OIL METER - 1/2" (1,500psi)

L-DOM35-01



The new L-DOM35-01 digital oval gear oil meter from Lubemate has been designed to reliably dispense engine oil, gear oil, transmission fluid & premix automotive coolants. The L-DOM35-01 has a maximum working pressure up to 1,500psi and is suitable for most medium to high pressure applications. The highly accurate 5 digit display allows for easy reading & accountability across metric & imperial units.

**MAX WORKING
PRESSURE
1,500psi**







**High accuracy
digital oil meter**
5 digit easy to read,
resettable LCD display.

**Variable
measurement units**
can be set to display in
litres, gallons, pints & quarts.

Heavy duty construction
makes it suitable to use
on a wide range of pumps.


TECHNICAL SPECIFICATIONS

-  Inlet/outlet: 1/2" BSP (F)
-  Flow range: 1-35LPM
-  Accuracy: +/- 0.5%
-  Max pressure up to 10,000kPa (1,500psi)

RECOMMENDED USE WITH

-  Suitable for oils up to SAE 140, engine oils, gear oils, ATF, hydraulic oils and premixed coolants

INCLUDED IN THIS PACK

-  Digital meter, 1 x 3.6V battery and instruction manual

DIGITAL OIL METER - 1/2" (725psi)

L-DOM35-02



The new L-DOM35-02 digital oval gear oil meter from Lubemate has been designed to reliably dispense engine oil, gear oil, transmission fluid & premix automotive coolants. The L-DOM35-02 has a maximum working pressure up to 725psi and is suitable for most applications. The highly accurate 5 digit display allows for easy reading & accountability across metric & imperial units.

**MAX WORKING
PRESSURE
725psi**



**High accuracy
digital oil meter**
5 digit easy to read,
resettable LCD display.

**Variable
measurement units**
can be set to display in
litres, gallons, pints & quarts.

Heavy duty construction
with shockproof rubber
makes it suitable to use
on a wide range of pumps.

TECHNICAL SPECIFICATIONS

- Inlet/outlet: 1/2" BSP (F)
- Flow range up to 1-35LPM
- Accuracy: +/- 0.5%
- Max pressure up to 5,000kPa (725psi)

RECOMMENDED USE WITH

- Suitable for oils up to SAE 140, engine oils, gear oils, ATF, hydraulic oils and premixed coolants

INCLUDED IN THIS PACK

- Digital oil meter, 1 x 3V battery and instruction manual

DIGITAL OIL METER - 3/4" (725psi)

L-DOM80-01



The new L-DOM80-01 digital oval gear oil meter from Lubemate has been designed to reliably dispense engine oil, gear oil, transmission fluid & premix automotive coolants. The L-DOM80-01 has a maximum working pressure up to 725psi and is suitable for most applications. The highly accurate 5 digit display allows for easy reading & accountability across metric & imperial units.

**MAX WORKING
PRESSURE
725psi**







**High accuracy
digital oil meter**
5 digit easy to read,
resettable LCD display.


**Variable
measurement units**
can be set to display in
litres, gallons, pints & quarts.

Heavy duty construction
with shockproof rubber
makes it suitable to use
on a wide range of pumps.


TECHNICAL SPECIFICATIONS

-  Inlet /outlet: 3/4" BSP (F)
-  Flow range: 6-80LPM
-  Accuracy: +/- 0.5%
-  Max pressure up to 5,000kPa (725psi)

RECOMMENDED USE WITH

-  Suitable for oils up to SAE 140, engine oils, gear oils, ATF, hydraulic oils and premixed coolants


INCLUDED IN THIS PACK

-  Digital oil meter, 1 x 3V battery and instruction manual

ADBLUE/DEF STAINLESS STEEL NOZZLE L-SSANM



The new heavy duty AdBlue/DEF Automatic Nozzle from Lubemate has been designed for liquid transfer of AdBlue and DEF liquids up to 60LPM. The premium nozzle comes standard with a stainless steel auto shut-off nozzle to prevent overfilling as well as a magnetic tank adaptor to ensure you get the correct fit for your AdBlue applications. Comes complete with stainless steel heavy duty swivel, the Lubemate AdBlue/DEF Automatic Nozzle is the most versatile piece of equipment for your AdBlue & DEF delivery.

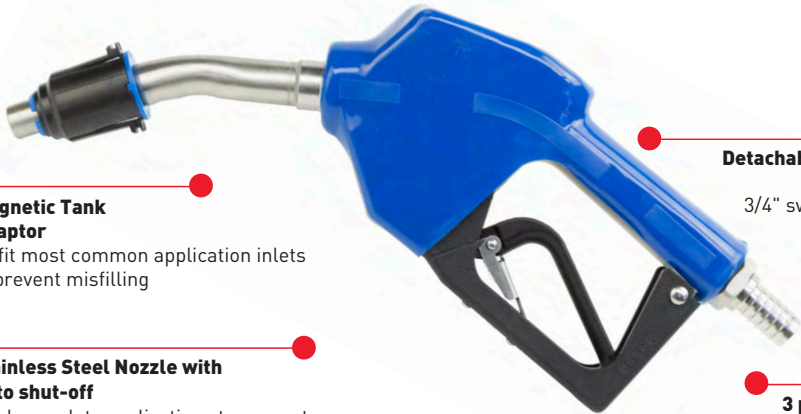

Magnetic Tank Adaptor

To fit most common application inlets to prevent misfilling

Stainless Steel Nozzle with Auto shut-off

For heavy duty applications to prevent overfilling

Detachable Stainless Steel Swivel

3/4" swivel hose tail inlet

3 position latch mechanism

Allows flow control in 3 positions



UREA/DEF MAGNETIC TANK ADAPTOR

L-MTA

- ✓ Mis-filling prevention device for AdBlue/DEF



SS SWIVEL FOR DEF/AUTO NOZZLE - 3/4"

L-SS19

- ✓ Swivel (304) for DEF/AdBlue Automatic Nozzle (L-SSANM)
- ✓ Stainless Steel (304)
- ✓ 3/4" swivel hose tail
- ✓ Suits 3/4" hose

TECHNICAL SPECIFICATIONS

- ✓ 3/4" swivel hose tail inlet
- ✓ Flow rate: 60L/min max
- ✓ Stainless steel nozzle (304)
- ✓ 19mm o.d. spout
- ✓ 304 Stainless Steel construction

RECOMMENDED USE WITH

- ✓ Suitable for UREA/AdBlue/DEF fluids

PRODUCT INCLUSIONS

- ✓ Stainless steel nozzle, L-MTA magnetic tank adaptor and L-SS19 3/4" swivel hose tail

ADBLUE/DEF POLY AUTOMATIC NOZZLE

L-PAN



The new Poly Automatic AdBlue/DEF nozzle from Lubemate has been designed for liquid transfer of urea and DEF liquids. The premium nozzle comes standard with safety auto shut-off device to prevent overfilling and wastage.

Automatic Nozzle

Prevent overspills
& wastage

Lightweight polypropylene body & stainless steel nozzle

Good balance of weight & strength

3/4" Stainless Steel (304) hose tail

Heavy duty to suit 3/4" hose

3 position latch mechanism

Allows flow control in
3 positions



SS SWIVEL FOR POLY AUTO NOZZLE

L-PASW

- ✓ Swivel for DEF/AdBlue Poly Automatic Nozzle
- ✓ Swivel for L-PAN
- ✓ Stainless Steel (304)

TECHNICAL SPECIFICATIONS

- ✓ 3/4" swivel hose tail inlet
- ✓ Polypropylene body
- ✓ Automatic shut-off nozzle
- ✓ 19mm stainless steel spout
- ✓ Pump use only
- ✓ 45LPM max flow

RECOMMENDED USE WITH

- ✓ Suitable for UREA/AdBlue/DEF fluids

PRODUCT INCLUSIONS

- ✓ Poly automatic nozzle and swivel (L-PASW)

ADBLUE/DEF POLY MANUAL NOZZLE

L-PMN



The ultra light duty AdBlue/DEF nozzle from Lubemate has been designed for simplicity and cost-effectiveness. Lightweight and ergonomic, the ultra light duty nozzle fits well in any hand and is suited for low budget applications.

Simple & basic design

Cost effective for low budget applications






1" BSPP poly swivel

Fits most hose and pump assembly for easy swap out


Lightweight polypropylene body

High quality manual nozzle for both pump & gravity applications


TECHNICAL SPECIFICATIONS

-  Manual trigger nozzle
-  Flow rate: 60LPM
-  19mm Barb inlet
-  19mm o.d. spout
-  Suitable for pump & gravity applications

RECOMMENDED USE WITH

-  Suitable for UREA/AdBlue/DEF fluids

INCLUDED IN THIS PACK

-  Poly manual nozzle

AUTOMATIC DIESEL NOZZLE - PREMIUM

L-FNADP



The new heavy duty Automatic Diesel Nozzle from Lubemate has been designed for diesel fuel delivery up to 60LPM. The premium nozzle comes standard with a stainless steel tip & auto shut-off nozzle to prevent overfilling. Comfortable to handle but built tough for application, the L-FNADP is your dependable Lubemate diesel dispenser. It is fitted with a positioning control device which allows the nozzle to shut-off when falling out of a vehicle, and is tipped up, limiting spillage and unsafe conditions.

Tough & Ergonomic

Anti-slip handle for comfortable & safe operation

Stainless Steel spout & auto shut-off

SS tip extends the service life of spout and auto shut-off prevents overspills & wastage

Position Control Device

Auto shut-off when displaced and tipped up

3 position latch mechanism

Allows flow control in 3 positions

TECHNICAL SPECIFICATIONS

- Inlet size: 3/4" BSPP (F)
- Flow rate: 60L/min
- Outer diameter: 15/16" o.d. spout
- Pump use only

RECOMMENDED USE WITH

- Suitable for diesel fuels only

INCLUDED IN THIS PACK

- Automatic diesel nozzle

MOBILE WASTE OIL DRAINER

L-OD90B



The new Mobile Waste Oil Drainer from Lubemate is a versatile oil drainer for your workshop. With a swivel extension arm, the L-OD90B can extend to 1.85m to drain diff & transmission fluids into its 90L powder coated steel tank. The addition of the heavy duty, polyurethane wheels make it easier to move around the workshop.

Filter Mesh Screen In Bowl
Catch foreign items.

Telescopic Suction Tube
Easy height adjustment.
Extends to 1.85m.
Normal height 1.65m.

Waste Oil Level Tube
Identify oil level inside holding tank.

Powder Coated Steel Tank
90L capacity.

Wide Bowl Extender
Large enough for automatic transmission draining.
Extender diameter 600mm.

Oil Bowl
Diameter 400mm.

Offset Swiveling Bowl
For easy bowl positioning
Swiveling diameter up to 800mm.

Handy Tool Tray
Keep tools and accessories within reach.

Polyurethane Wheels
Easier manoeuvring over workshop floors.



TECHNICAL SPECIFICATIONS

- Gravity waste oil drainer
- Suitable for draining waste oil from engines, gear boxes and differentials of all vehicles
- Tank capacity: 90L
- Max Drainer Capacity: 90L
- Oil Draining Pressure: 1 bar
- Length of oil release pipe: 1.6m
- Maximum oil temperature: 120°C

RECOMMENDED USE WITH

- Suitable for draining all automotive oils from engines, gear box/transmissions and differentials
- Recommended operating oil temperatures of up to 120°C

INCLUDED IN THIS PACK

- Mobile waste oil drainer and instruction manual

TRUCK WASTE OIL DRAINERS

L-TOD110P, L-TOD95

12
MONTH
MACNAUGHT
WARRANTY*

The new range of Truck Waste Oil Drainers from Lubemate come in two sizes to meet your heavy workshop needs. The premium L-TOD110P is rated up to 110L and its smaller brother the L-TOD95 at 95L is smaller yet agile to maneuver. Suitable for the draining of waste oils and antifreeze from trucks and passenger cars.

Large Catchment Area
Minimise workshop floor spills

4 Wheel trolley design
Sturdy yet easy to move



L-TOD110P

Easy Access Drain Plug
Quick evacuation by pump or gravity

TECHNICAL SPECIFICATIONS

- Low level oil drainer with swivel castors for easy movement
- Large 110L capacity
- Anti-splash screen which can be used as a support for draining oil filters
- Solid steel construction
- 1/2" drain valve for easy evacuation

RECOMMENDED USE WITH

- Waste motor oil, gear oil or differential oil from trucks and passenger cars

INCLUDED IN THIS PACK

- Truck waste oil drainer

Large Catchment Area
Minimise workshop floor spills

4 Wheel trolley design
Sturdy yet easy to move



L-TOD95

Easy Access Drain Plug
Quick evacuation by pump or gravity

TECHNICAL SPECIFICATIONS

- Low level oil drainer with swivel castors for easy movement
- Large 95L capacity
- Anti-splash screen which can be used as a support for draining oil filters
- Solid steel construction
- 1/2" drain valve for easy evacuation

RECOMMENDED USE WITH

- Waste motor oil, gear oil or differential oil from trucks and passenger cars

INCLUDED IN THIS PACK

- Truck waste oil drainer

ADBLUE ACCESSORIES

L-MTA, LH198B, L-SS19, L-PASW



ADBLUE MAGNETIC TANK ADAPTOR

L-MTA

- ✓ Mis-filling prevention device for AdBlue/DEF
- ✓ To suit AdBlue Automatic Nozzle (L-SSANM) with 19mm o.d. spout

EPDM UREA/DEF HOSE - 3/4" x 8M

LH198B

- ✓ Diameter: 19mm ID
- ✓ Material: EPDM rubber
- ✓ Wall thickness: 4mm
- ✓ Length: 8 metres
- ✓ Max pressure: 200psi
- ✓ To suit AdBlue, DEFs, UREA/WATER



SS SWIVEL FOR DEF/AUTO NOZZLE - 3/4"

L-SS19

- ✓ SS [304] Swivel for DEF/AdBlue Automatic Nozzle
- ✓ 3/4" BSP (M)
- ✓ To suit AdBlue Automatic Nozzle (L-SSANM)

SS SWIVEL FOR POLY AUTO NOZZLE

L-PASW

- ✓ Swivel for DEF/AdBlue Poly Automatic Nozzle
- ✓ Stainless Steel Swivel
- ✓ To suit AdBlue Poly Auto Nozzle (L-PAN)



OIL ACCESSORIES

L-REXM, L-FEXA



RIGID EXTENSION MANUAL NOZZLE - 1/2"


L-REXM

- ✓ Suited for use with most oil control guns
- ✓ Rigid tube with manual nozzle
- ✓ 1/2" BSP (M) inlet

FLEXIBLE EXTENSION AUTOMATIC NOZZLE - 1/2"

L-FEXA

- ✓ Suited for use with most oil control guns
- ✓ Flexible hose 95° with auto-nozzle
- ✓ 1/2" BSP (M) inlet

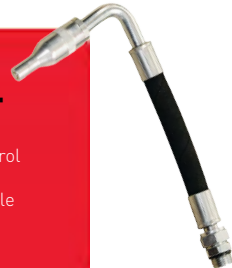

FUEL ACCESSORIES



LH254AS, LH2510N, L-UCFL, L-FOFL, L-PFFL

ANTI-STATIC FUEL HOSE - 1" x 4M WITH 1" BSP FITTINGS

LH254AS

- 1" i.d. anti-static fuel delivery hose suitable for ULP and diesel fuel
- 1" BSP (M) crimped fittings
- Suitable for use with Gravity feed, Manual & Electric Fuel Pumps
- 1" i.d. x 4m hose length
- Excellent UV resistance & flexibility
- 6" strain relieving springs on hose ends
- Max working pressure: 145psi



DIESEL FUEL HOSE - 1" x 10m

LH2510N

- 1" i.d. Diesel delivery hose Reinforced
- Nitrile rubber hose, diesel and oil resistant
- Suitable for suction and delivery of oils & diesel fuel only
- 1" i.d. x 10m hose length
- UV stabilised
- Operating temperature of -20°C to +80°C
- Max working pressure: 300psi



UNIVERSAL CLAMPING FUNNEL

L-UCFL

- One size fits all
- Fits on openings ranging from 1" (25mm) - 3-1/8" (80mm)
- Suitable for use with light, medium and high viscosity oils, diesel, detergents and gasoline



FUEL & OIL FUNNEL

L-FOFL

- Spout dimensions: 1 - 3/4" (45mm), 1-1/8" (29mm)
- Suitable for use with diesel, urea, and other water based media



PORTABLE FUEL FILTER FUNNEL

L-PFFL

- Anti-static, heavy duty, fast-flow portable funnel
- Filter out free water and solids till 100 microns from fuel
- Suitable for use with diesel, gasoline, kerosene and light oils
- Teflon coated stainless steel filter element



PRICE LIST & DIMENSIONS

Stock Code	Description	Page	2018 List Price AU\$	Barcodes	Pack Width (mm)	Pack Height (mm)	Pack Depth (mm)	Pack Weight (kg)
L-DHFG	HIGH FLOW DIGITAL OIL GUN WITH RIGID EXT AUTO NOZZLE	3	\$449.00	9317147740456	155	110	400	2.5
L-DOBTP	DIGITAL OIL TRANSFER TAP PUMP MOUNT	7	\$209.00	9317147740425	230	85	235	4
L-DOGFA	DIGITAL OIL CONTROL GUN WITH FLEX EXT AND AUTO NOZZLE	4	\$279.00	9317147740401	155	110	325	1.8
L-DOGRM	DIGITAL OIL CONTROL GUN WITH RIGID EXT AND MAN NOZZLE	4	\$265.00	9317147740418	155	110	325	1.8
L-DOM35-01	DIGITAL OIL METER - 1/2" 1500PSI	8	\$149.00	9317147740470	95	65	120	0.68
L-DOM35-02	DIGITAL OIL METER - 1/2" - 750PSI	9	\$149.00	9317147740487	85	80	120	0.68
L-DOM80-01	DIGITAL OIL METER - 3/4" - 750PSI	10	\$199.00	9317147740494	105	100	130	0.68
L-DPOCG	DIGITAL PRESET OIL CONTROL GUN	5	\$499.00	9317147740449	160	130	335	2.5
L-FEXA	FLEX EXT AUTO 1/2" - LUBEMATE	17	\$56.00	9317147740500	160	30	270	0.3
L-FNADP	AUTO DIESEL NOZZLE PREMIUM 60 LPM	14	\$99.00	9317147740548	180	60	420	1.3
L-FOFL	FUEL & OIL (TRACTOR FUNNEL)	18	\$12.50	9317147738996				
L-HFQG	HIGH FLOW OIL CONTROL GUN WITH FLEX EXT AUTO NOZZLE	3	\$229.00	9317147740463	180	55	320	2
L-MTA	UREA/DEF MAGNETIC TANK ADAPTOR	11/17	\$60.00	9317147740586	40	40	70	0.1
L-OBTPP	OIL TRANSFER TAP W/O METER PUMP MOUNT	7	\$119.00	9317147740432	230	50	225	3
L-OCGAE	OIL CONTROL GUN AUTO NOZZLE - ECONOMY	6	\$109.00	9317147740531	50	180	390	1.25
L-OCGME	OIL CONTROL GUN MAN NOZZLE - ECONOMY	6	\$99.00	9317147740524	50	180	390	1.25
L-OD90B	MOBILE WASTE OIL DRAINER 90L	15	\$595.00	9317147740661	480	1200	480	32
L-OGFA	OIL CONTROL GUN WITH FLEX EXT AND AUTO NOZZLE	4	\$135.00	9317147740388	200	55	310	1.5
L-OGRM	OIL CONTROL GUN WITH RIGID EXT AND MANUAL NOZZLE	4	\$125.00	9317147740395	200	55	310	1.3
L-PAN	UREA/DEF POLY AUTO NOZZLE 60 LPM	12	\$185.00	9317147740562	180	60	450	0.8
L-PASW	SS SWIVEL FOR POLY AUTO NOZZLE	12/17	\$29.00	9317147740593	40	40	70	0.1
L-PFFL	PORTABLE FUEL FILTER FUNNEL	18	\$59.00	9317147739016	356	265	141	0.13
L-PMN	UREA/DEF POLY MANUAL NOZZLE	13	\$79.00	9317147740579	170	60	350	0.3
L-QRC	QUICK RELEASE COUPLER LUBEMATE	2	\$29.90	9317147740678	120	25	120	0.085
L-QRCXL	QUICK RELEASE COUPLER LONG NOSE LUBEMATE	2	\$49.00	9317147740685	120	25	190	0.13
L-QRC-KIT2	LUBEMATE COUPLER POS KIT	2						
L-REXM	RIGID EXT MAN 1/2" - LUBEMATE	17	\$42.00	9317147740517	170	30	220	0.2
L-SS19	SS SWIVEL FOR DEF/AUTO NOZZLE - 3/4"	11/17	\$35.00	9317147740609	40	40	70	0.1
L-SSNM	UREA/DEF SS AUTO NOZZLE W/MAGNETIC ADAP. & SWIVEL 60 LPM	11	\$499.00	9317147740555	180	70	410	2
L-TOD95	TRUCK WASTE OIL DRAINER STANDARD - 95L	16	\$555.00	9317147740654	680	280	1200	30
L-TOD110P	TRUCK WASTE OIL DRAINER PREMIUM - 110L	16	\$849.00	9317147740647	800	250	1400	35
L-UCFL	UNIVERSAL CLAMP FUNNEL	18	\$59.00	9317147739009	450	215	125	0.31
LH198B	EPDM UREA/DEF HOSE ASSEMBLY 3/4" x 8M	17	\$148.00	9317147740616	320	140	320	3.75
LH254AS	ANTI-STATIC FUEL HOSE 1" x 4M WITH 1" BSP(M) FITTINGS	18	\$90.00	9317147740623	350	90	350	3.5
LH2510N	DIESEL FUEL HOSE 1" x 10M	18	\$199.00	9317147740630	450	140	450	7

