


MACNAUGHT DIESEL INLINE METER

Digital turbine meter for low viscosity fluids, easy to install inline or for end of the line applications.

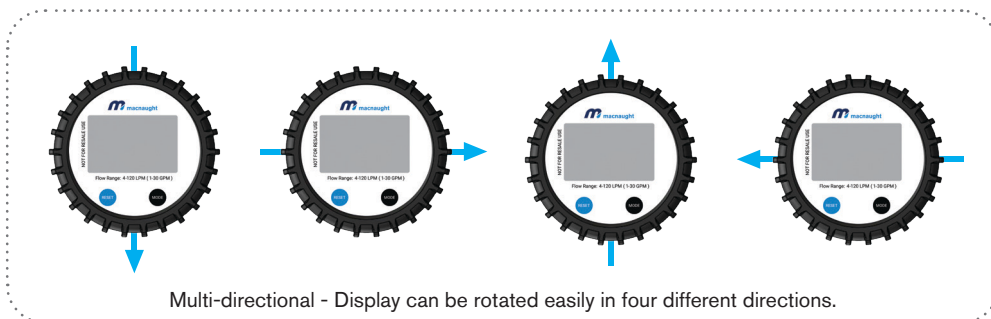

Multi-directional - Display can be rotated easily in four different directions.

ADTFM-2
1" Turbine diesel meter

FEATURE & BENEFITS

- Versatile compatibility - display can be changed by rotating the card in its housing thus ensuring great versatility in positioning of the meter.
- Bi-directional: Either port can be used for Inlet or Outlet.
- Compact and durable design - cast aluminium body and sealed electronic card making it suitable for long lasting use.
- Wide range of applications - suitable for various applications such as automotive, agriculture and industrial processes where mobile diesel tanks are used.
- Easy to use and recalibrate
- Suitable to use with Macnaught Poly Diesel Tanks

TECHNICAL SPECIFICATIONS

- Flow rate range - 4 to 120 LPM
- Used for diesel only
- Working temperature range - 20°C to 70°C
- IP 55 Rated
- Maximum working pressure 150 psi
- 1" BSP (F) Ports

APPLICATIONS

- Suitable for various applications such as automotive, agriculture, and industrial processes where mobile diesel tanks are used.

PACKAGE INCLUDES

- Meter and 1" male to male BSP adaptor