


# C1 & R3 SERIES REELS

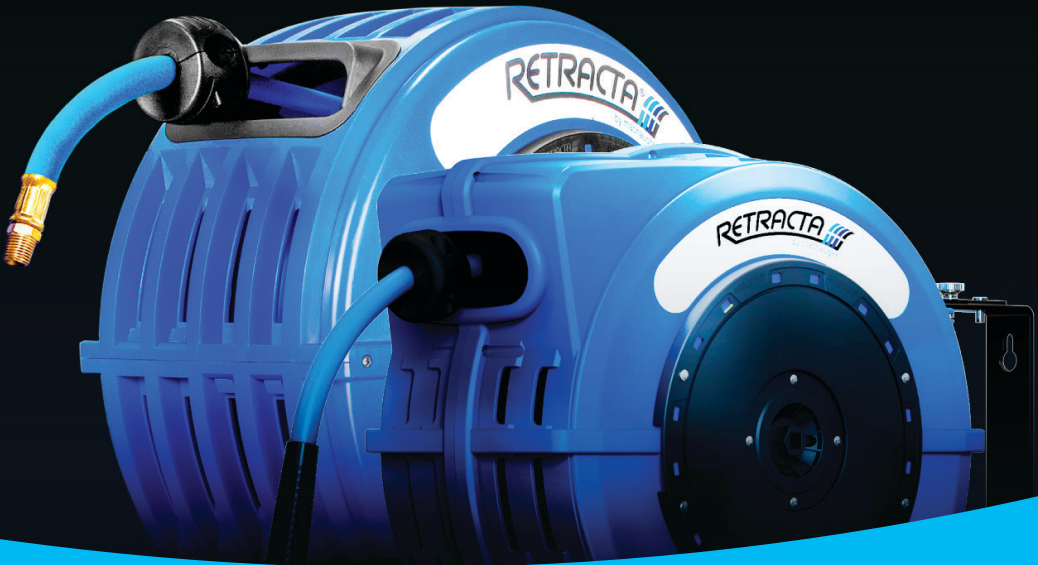

[macnaught.com](http://macnaught.com)

**RETRACTA®**   
by macnaught

# RETRACTA IN THE INDUSTRY

---

Retracta is the benchmark in industrial strength retractable hose reels. Over the decades the Retracta brand has built an enviable reputation worldwide for performance and reliability. Through this, and with a long history of innovation and design, Macnaught has developed an exciting range of Retracta reels specifically designed and engineered for demanding industrial applications and environments.

Innovation has always been at the centre of the Macnaught success story and it's the platform for developing our expanded Retracta range.

At Macnaught we call it "Innovation by Design".

## **R3 Series**

The Retracta R3 Series are industrial strength poly hose reels, built here in Australia.

The Retracta reel, manufactured in high impact polypropylene is found in countless applications around Australia and the wider world. Our legendary R3 hose reel is renowned for unmatched performance, reliability and durability. This is what sets us apart from our competitors and gives our customers confidence, backed by Macnaught's 10 year mechanical warranty.

## **RACR® Safety System**

Available on selected models of R3 Series Reels is the Retracta Adjustable Control Return (or RACR®) safety system which provides true control by allowing the user to set the speed of hose return to suit their individual requirements, minimising damage or injuries due to hose whip. Safe, durable, serviceable and adjustable the RACR® brings new level of superiority to the hose reel market.

## **C1 Series**

Designed in Australia, the latest C1 series brings you a Retracta for smaller spaces. The new range of C1 Series Poly Hose Reels, Barrier Reels, and Electrical Cable Reels are 35% smaller than the R3 series and are ideal for small spaces and compact applications.

***More from Retracta***

Over the years Retracta has proven it is more than just a poly reel market leader, but a true innovator in other demanding markets and thus has developed a solid following for robust and reliable performance in metal reels.

For more information on the Retracta range of metal reels, please see page 18, or visit [macnaught.com](http://macnaught.com)

# Retracta

Case Material		Poly			
Case Style		Vented	Vented	Enclosed	Enclosed
Brand		Retracta	Retracta	Lubemate	Retracta
Series		R3 Series	C1 Series	P Series	E Series

Fluid / Medium					
Air	✓	✓	✓	✓	
Water	✓	✓	✓	✓	
Cold Wash	✓	✓			
Hot Wash	✓	✓			
Garden / Horticulture	✓	✓	✓		
High Pressure Water	✓				
Fire Resistant Anti Static (F.R.A.S)	✓				
AdBlue / DEF					
Weedicide / Pesticide	✓	✓			
Diesel					
Oil	✓			✓	
Grease	✓			✓	
Oxygen / Acetylene	✓				
Oxygen / LPG	✓				
Coolant	✓				
Argon	✓				
LPG (Propane)	✓				
Barrier Tape			✓		
Electrical Cord			✓		

Industry					
Agriculture	✓	✓	✓		
Automotive	✓	✓	✓	✓	
Manufacturing	✓			✓	
Industrial & Mining	✓			✓	
Transport	✓			✓	

Application					
Irrigation	✓	✓	✓		
Food Processing Sites	✓	✓			
Manufacturing Plants	✓	✓	✓	✓	
Service Vehicles	✓				
Warehouses		✓	✓		
Wash Down Areas	✓	✓			
Weed / Pest Control	✓	✓			
Workshops	✓	✓	✓	✓	





# C1 Series


## C1 SERIES FEATURES

- UV stabilised & resistant poly case
- Australian designed
- 180° Swivel bracket
- 3 Position swivel locking
- Powder coated steel bracket
- 1.5m Feed hose included

## COMPRESSED AIR / WATER

Hybrid polymer hose with bend restrictors. For flexibility, to lay flat and prevent tangles or kinking under pressure, maximum working pressure 250 psi.




Case Colour	Blue	
Part Number	C1AW315B-01CB	C1AW412B-01CC
Hose Size (ID)	3/8" (10mm)	1/2" (12mm)
Hose Length	15m	12m
Feed Hose Length	1.5m	
Hose Colour	Blue 	
Feed Hose Inlet	3/8" BSPT (M)	
Reel Inlet	3/8" BSPT (F)	
Hose Outlet	1/4" BSPT (M)	3/8" BSPT (M)
Hose Material	Hybrid Polymer	
Working Pressure	250 psi	
Max Temperature	60°C	

## HOT / COLD WATER

High temperature Hybrid Polymer hose with bend restrictors, rated to 80°C, maximum working pressure 300 psi. C1HC412R-01DD-SG includes hot wash trigger nozzle.



Case Colour	Red	
Part Number	C1HC412R-01DD	C1HC412R-01DD-SG
Hose Size (ID)	1/2" (12mm)	
Hose Length	12m	
Feed Hose Length	1.5m	
Hose Colour	Red 	
Feed Hose Inlet	1/2" BSP (F) Swivel	
Reel Inlet	1/2" BSPT (F)	
Hose Outlet	1/2" BSPT (M)	
Hose Material	High Temperature Hybrid Polymer	
Working Pressure	300 psi	
Max Temperature	80°C	
Trigger Nozzle	Not Included	Included

# COMPRESSED AIR & WATER




## GARDEN / HORTICULTURE

Hybrid polymer hose with bend restrictors. For flexibility, to lay flat and prevent tangles or kinking under pressure, maximum working pressure 150 psi. Trigger nozzle with 7 adjustable spray patterns, adjustable flow control and hands free clip.




Case Colour	Dark Grey
Part Number	C1DR412D-03DD
Hose Size (ID)	1/2" (12mm)
Hose Length	12m
Feed Hose Length	1.5m
Hose Colour	Green 
Feed Hose Inlet	1/2" Quick Connector (F)
Reel Inlet	1/2" BSPT (F)
Hose Outlet	1/2" Quick Connector (F)
Hose Material	Hybrid Polymer
Working Pressure	150 psi
Max Temperature	60°C

## RETRACTA SIZE GUIDE



R3 SERIES



C1 SERIES

35%  
SMALLER  
IN SIZE

# C1 Series

# SAFETY BARRIER & ELECTRICAL CABLE

## SAFETY BARRIER

48mm cloth tape in both red/white stripe to mark danger areas and yellow/black stripe to indicate caution areas. Tape lock off function to maintain barrier tape tension and magnetic tape anchor point.



Case Colour	Yellow	
Part Number	C1BRW5025Y	C1BYB5025Y
Tape Length	25m	
Tape Width	48mm	
Tape Colour	Red / White Stripe	Yellow / Black Stripe

DANGER



CAUTION



## ELECTRICAL CABLE

10 Amp or 15 Amp SAA: AS/NZ 3105 compliant electrical cable reel with thermal overload protection. 1.5m feed cable.



Case Colour	Dark Grey	
Part Number	C1EC10A20D-AU	C1EC15A20D-AU
Cable Length	20m	20m
Feed Cable Length	1.5m	
Plug Type (Inlet)	AU 3 Pin Flat - 10 A (M)	AU 3 Pin Flat - 15 A (M)
Plug Type (Outlet)	AU 3 Pin Flat - 10 A (F)	AU 3 Pin Flat - 15 A (F)
Maximum Voltage	240 V	
Maximum Amperage	10 A	15 A
Maximum Wattage Coiled	1000 W	1600 W
Maximum Wattage Uncoiled	2000 W	3200 W
Cable Size	3 x 1.5mm <sup>2</sup>	3 x 2.5mm <sup>2</sup>
Compliance	SAA: AS/NZS 3105	

# WEEDICIDE/PESTICIDE




## WEEDICIDE / PESTICIDE

Weedicide / Pesticide resistant PVC hose, maximum working pressure 300 psi.



Case Colour	Red
Part Number	C1WD315R-01CB
Hose Size (ID)	3/8" (10mm)
Hose Length	15m
Feed Hose Length	1.5m
Hose Colour	Black 
Feed Hose Inlet	3/8" BSPT (M)
Reel Inlet	3/8" BSPT (F)
Hose Outlet	1/4" BSPT (M)
Hose Material	Weedicide / Pesticide Resistant PVC
Working Pressure	300 psi
Max Temperature	60°C

## DIMENSIONS

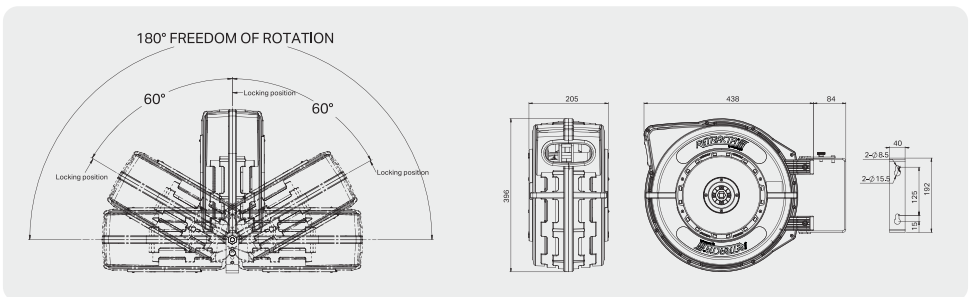

# R3 Series

## R3 SERIES FEATURES

- UV stabilised & impact resistant poly case
- Designed and manufactured in Australia
- ProGlide high wear resistant mouth
- Advanced spring technology
- 180° Galvanised steel swivel mounting bracket
- Light weight & easy to handle

## RETRACTAFLEX HOSE

Hybrid polymer hose with bend restrictors, maximum pressure 300 psi, for the ultimate flexibility, to lay flat and prevent tangles or kinking under pressure. Available in 2 colours.



Case Colour	Blue	
Part Number	RO320B-01	RO420B-01
RACR Part Number	ROC320B-01	ROC420B-01

Case Colour	Dark Grey	
Part Number	RO320D-01	RO420D-01
RACR Part Number	ROC320D-01	ROC420D-01

Hose Size (ID)	3/8" (10mm)	1/2" (12mm)
Hose Length	20m	20m
Hose Colour	Orange <span style="color: orange;">○</span>	
Reel Inlet	3/8" BSP (F)	
Hose Outlet	1/4" BSP (M)	3/8" BSP (M)
Hose Material	RetractaFLEX Hybrid Polymer	
Working Pressure	300 psi	
Max Temperature	60°C	

## PREMIUM HOSE

Reinforced PVC hose, maximum pressure 275 psi, abrasive resistant for high durability abrasive resistant. Available in 3 colours.



Case Colour	Red		
Part Number	AR320R-01	AR415R-01	AR420R-01
RACR Part Number	ARC320R-01		ARC420R-01

Case Colour	Blue		
Part Number	AR320B-01	AR415B-01	AR420B-01
RACR Part Number	ARC320B-01		ARC420B-01

Case Colour	Dark Grey		
Standard Part Number	AR320D-01	AB415D-01	AB420D-01

Hose Size (ID)	3/8" (10mm)	1/2" (12mm)	
Hose Length	20m	15m	20m
Hose Colour	Yellow <span style="color: yellow;">○</span>		
Reel Inlet	3/8" BSP (F)		
Hose Outlet	1/4" BSP (M)	3/8" BSP (M)	
Hose Material	Premium Reinforced PVC		
Working Pressure	275 psi		
Max Temperature	60°C		

# COMPRESSED AIR & WATER



## ADJUSTABLE RETURN SAFETY HOSE REEL

- RACR® Safety system minimises damage or injuries from hose whip
- Available on R3 models, look for the RACR® icon



### ADJUSTABLE HOSE RETURN



### STANDARD REEL



## STANDARD HOSE

Hybrid polymer hose, maximum pressure 250 psi, for durability.



Case Colour	Blue			
Part Number	AW315B-01	AW320B-01	AW415B-01	AW420B-01
Hose Size (ID)	3/8" (10mm)		1/2" (12mm)	
Hose Length	15m	20m	15m	20m
Hose Colour	Blue <span style="color: blue;">○</span>			
Reel Inlet	3/8" BSP (F)			
Hose Outlet	1/4" BSP (M)		3/8" BSP (M)	
Hose Material	Hybrid Polymer			
Working Pressure	250 psi			
Max Temperature	60°C			

## FIRE RESISTANT ANTI-STATIC AIR / WATER REEL (F.R.A.S.)

Fire resistant anti static reinforced PVC hose, maximum working pressure 300 psi. Reel constructed in polypropylene and brass, no aluminum. Note, fire resistant anti static only applies to the hose and does not include the reel body.



Case Colour	Dark Grey			
Part Number	FRAS415D-01			
Hose Size (ID)	1/2" (12mm)			
Hose Length	15m			
Hose Colour	Yellow <span style="color: yellow;">○</span>			
Reel Inlet	1/2" BSP (F)			
Hose Outlet	1/2" BSP (M)			
Hose Material	Reinforced PVC (F.R.A.S.)			
Working Pressure	300 psi			
Max Temperature	60°C			

# R3 Series

## HOT WATER

High temperature resistant PVC hose with bend restrictors, maximum pressure 290 psi at 20°C, 100 psi at 80°C. Maximum temperature 85°C. Extremely reliable for hot water application.



Case Colour	Red	
Part Number	HW415R-01	HW420R-01
RACR Part Number		HWC420R-01
Hose Size (ID)	1/2" (12mm)	
Hose Length	15m	20m
Hose Colour	White <input type="radio"/>	
Reel Inlet	1/2" BSP (F)	
Hose Outlet	1/2" BSP (M)	
Hose Material	High Temperature Chemical Resistant PVC	
Working Pressure	290 psi at 20°C 100 psi at 80°C	
Max Temperature	85°C	

## COLD WATER

Premium reinforced PVC hose with brass hose connector and quick connect nozzle, maximum pressure 150 psi.



Case Colour	Blue	
Part Number	CW420B-01	
RACR Part Number	CWC420B-01	
Hose Size (ID)	1/2" (12mm)	
Hose Length	20m	
Hose Colour	White <input type="radio"/>	
Reel Inlet	1/2" BSPT (F)	
Hose Outlet	1/2" Brass Quick Connector (F)	
Hose Material	Premium Reinforced PVC	
Working Pressure	150 psi	
Max Temperature	60°C	





## HIGH PRESSURE

High pressure wire reinforced rubber hose, maximum pressure 3000 psi. Maximum temperature 95°C. The ultimate in high pressure water delivery.



Case Colour	Red
Part Number	HP320R-01
Hose Size (ID)	3/8" (10mm)
Hose Length	20m
Hose Colour	Black <b>O</b>
Reel Inlet	3/8" BSP (F)
Hose Outlet	3/8" BSP (M)
Hose Material	Wire Reinforced Rubber
Working Pressure	3000 psi
Max Temperature	95°C

## GARDEN / HORTICULTURE

RetracataFLEX hybrid polymer hose, maximum pressure 150 psi, for the ultimate flexibility, to lay flat and prevent tangles or kinking under pressure. Available in 3 colours.



Case Colour	Green	
Part Number	DR418G-03	DR425G-03
RACR Part Number	DRC418G-03	DRC425G-03

Case Colour	Biege	
Part Number	DR418P-03	DR425P-03
RACR Part Number	DRC418P-03	DRC425P-03

Case Colour	Dark Grey	
Part Number	DR418D-03	DR425D-03

Hose Size (ID)	1/2" (12mm)	
Hose Length	18m	25m
Hose Colour	Green <b>O</b>	
Feed Hose Inlet	1/2" Quick Connector (F)	
Reel Inlet	3/4" BSP	
Hose Outlet	1/2" Quick Connector (F)	
Hose Material	RetracataFLEX Hybrid Polymer	
Working Pressure	150 psi	
Max Temperature	60°C	

## OIL

Wire reinforced rubber (SAE100R17) hose, maximum pressure 1000 psi for reliability and performance.



Case Colour	Blue
Part Number	OMP415B-01
RACR Part Number	OMPC415B-01
Hose Size (ID)	1/2" (12mm)
Hose Length	15m
Hose Colour	Black ○
Reel Inlet	1/2" BSP (F)
Hose Outlet	1/2" BSP (M)
Hose Material	Wire Reinforced Rubber (SAE100R17)
Working Pressure	1000 psi
Max Temperature	90°C

## GREASE

High tensile steel braid reinforced rubber (SAE100R2) hose, maximum pressure 5000 psi for reliability and performance.



Case Colour	Black
Part Number	GR215K-01
Hose Size (ID)	1/4" (6mm)
Hose Length	15m
Hose Colour	Black ○
Reel Inlet	1/4" BSP (F)
Hose Outlet	1/4" BSP (M)
Hose Material	Wire Reinforced Rubber (SAE100R2)
Working Pressure	5000 psi
Max Temperature	100°C


# WEEDICIDE/PESTICIDE



## WEEDICIDE / PESTICIDE

Chemical resistant PVC hose, maximum working pressure 250 psi. Designed specifically to handle the transfer and dispensing of weedicide and pesticide.



Case Colour	Red
Part Number	WD316R-01
Hose Size (ID)	3/8" (10mm)
Hose Length	16m
Hose Colour	Black 
Reel Inlet	3/8" BSP (F)
Hose Outlet	1/4" BSP (M)
Hose Material	Chemical Resistant PVC
Working Pressure	250 psi
Max Temperature	60°C

# R3 Series

## ARGON

Gas hose made from reinforced rubber compliant to AS 1335, maximum working pressure 200 psi.



Case Colour	Dark Grey
Part Number	ARG220D-04
Hose Size (ID)	3/16" (5mm)
Hose Length	20m
Hose Colour	Black ○
Reel Inlet	Gas Thread UNF (M)
Hose Outlet	Gas Thread UNF (F)
Hose Material	Reinforced Rubber (AS1335)
Working Pressure	200 psi
Max Temperature	60°C

## LPG

Gas hose made from reinforced rubber compliant to AS 1335, maximum working pressure 200 psi.



Case Colour	Black
Part Number	LPG220K-04
Hose Size (ID)	3/16" (5mm)
Hose Length	20m
Hose Colour	Orange ○
Reel Inlet	Gas Thread UNF (M)
Hose Outlet	Gas Thread UNF (F)
Hose Material	Reinforced Rubber (AS1335)
Working Pressure	200 psi
Max Temperature	60°C



## OXYACETYLENE

Twin gas hose made from reinforced rubber compliant to AS 1335, maximum working pressure 175 psi.



Case Colour	Blue	
Part Number	OA215B-04	
RACR Part Number	OAC215B-04	
Hose Size (ID)	Twin 3/16" (5mm)	
Hose Length	15m	
Hose Colour	Red	Blue
Reel Inlet	Gas Thread UNF (M)	
Hose Outlet	Gas Thread UNF (F)	
Hose Material	Reinforced Rubber (AS1335)	
Working Pressure	175 psi	
Max Temperature	80°C	


## OXYGEN/LPG

Twin gas hose made from reinforced rubber compliant to AS 1335, maximum working pressure 175 psi.




Case Colour	Black	
Part Number	OG215K-04	
Hose Size (ID)	Twin 5mm 3/16" (5mm)	
Hose Length	15m	
Hose Colour	Orange	Blue
Reel Inlet	Gas Thread UNF (M)	
Hose Outlet	Gas Thread UNF (F)	
Hose Material	Reinforced Rubber (AS1335)	
Working Pressure	175 psi	
Max Temperature	60°C	

## R3 DIMENSIONS

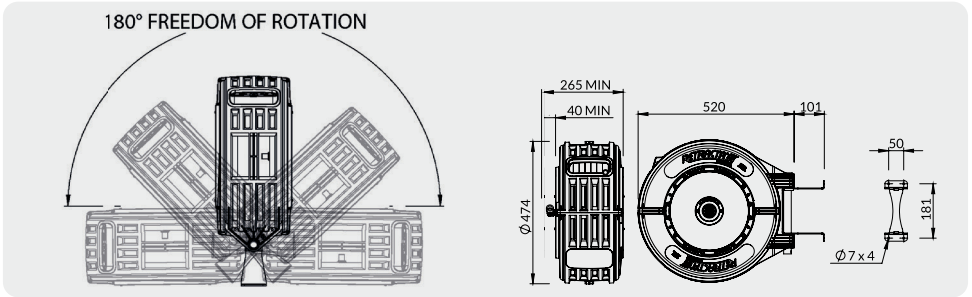

## RETRACTA SIZE GUIDE

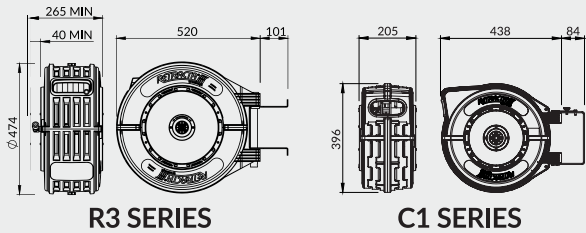


# METAL REELS

In addition to the C1 & R3 Series polypropylene case reels Macnaught has a range of Retractable metal reels. Designed, engineered and developed to meet the most demanding Australian conditions they are available in different types including enclosed case, single pedestal, twin pedestal and cradle frames to suit a variety of applications.



## E SERIES

Narrow foot print allows close gantry mounting.  
Powder coated pressed steel for rigidity and protection.

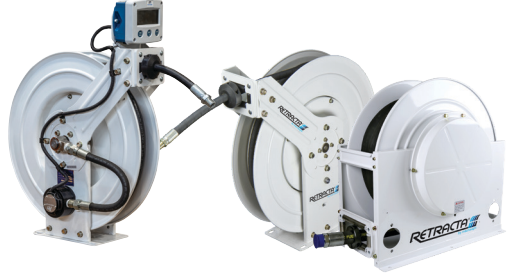

## F SERIES

Heavy duty steel construction with durable powder coated finish. Available in twin pedestal or cradle design, metered or non-metered.



## H SERIES

316 grade stainless steel wetted parts, compatible with Urea (AdBlue®, DEF)



## SS SERIES

Heavy duty 304 grade stainless steel construction with twin pedestal for strength and stability. Enclosed spring for safety.

## M SERIES

Single and twin pedestal reels with solid steel construction, powder coated for durability. Adjustable guides and enclosed springs for safety.



## SS SERIES

The SS Series of stainless steel reels has been made to withstand harsh environments, where stainless steel construction is essential. The twin pedestal design delivers strength and durability especially in high volume usage applications.


### FEATURES

- Heavy duty stainless steel construction
- Twin pedestal design for strength and stability
- Fully serviceable
- External enclosed spring for serviceability and safety


## AIR / WATER

Available in three reel sizes, with and without hose in three hose diameters 20m in length.



Hose Reels			
Part Number	FMATP1220-01-SS	FMATP1920-01-SS	FMATP2520-01-SS
Hose Size (ID)	1/2" (12mm)	3/4" (19mm)	1" (25mm)
Hose Length	20m		
Feed Hose Length	N/A		
Hose Colour	Black 		
Reel Inlet	1/2" BSPT (F)	3/4" BSPT (F)	1" BSPT (F)
Hose Outlet	1/2" BSPT (M)	3/4" BSPT (M)	1" BSPT (M)
Hose Material	PVC		
Working Pressure	300 psi	250 psi	250 psi
Max Temperature	60°C		
Reel Body Material	Stainless Steel (304 Grade)		



BARE REELS (Supplied without hose)			
Part Number	FMATP1220N-01-SS	FMATP1920N-01-SS	FMATP2520N-01-SS
Hose Size (ID)	1/2" (12mm)	3/4" (19mm)	1" (25mm)
Hose Length Capacity	20m		
Hose Colour	Black 		
Reel Inlet	1/2" BSPT (F)	3/4" BSPT (F)	1" BSPT (F)
Reel Outlet	1/2" UNF (M)	3/4" UNF (M)	1" UNF (M)
Hose Material	N/A		
Working Pressure	435 psi	435 psi	435 psi
Max Temperature	100°C		
Reel Body Material	Stainless Steel (304 Grade)		



## Y SERIES

The new Retracta Y Series hose reel range has been introduced to meet the demands of extreme environments where wash down hose reels are used. Designed with safety features from the ground up, Y Series reels are made from high quality materials providing the ultimate durability.

### FEATURES


- Manually operated safety system
- Adjustable clutch
- Stainless steel swivel with high quality seals
- Foldable handle

## AIR / WATER / OIL / DIESEL

Available in four reel sizes without hose, suitable for hose with 1/2" inner diameter up to 90m in length.

### Optional

- Roller hose guide
- Reel locking pin

BARE REELS (Supplied without hose)				
Part Number	YSWA1220N-DD	YSXA1235N-DD	YSYA1250N-DD	YSZA1290N-DD
Hose Size (ID)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)
Hose Length Capacity	20m	35m	50m	90m
Hose Colour	Black 			
Reel Inlet	1/2" BSPT (M)	1/2" BSPT (M)	1/2" BSPT (M)	1/2" BSPT (M)
Reel Outlet	1/2" BSPP (M)	1/2" BSPP (M)	1/2" BSPP (M)	1/2" BSPP (M)
Hose Material	N/A			
Working Pressure	5,800 psi	5,800 psi	5,800 psi	5,800 psi
Max Temperature	150°C			
Reel Body Material	Stainless Steel (304 Grade)			
Weight	9kg	10kg	11kg	15kg



YSWA1220N-DD



YSXA1235N-DD



YSYA1250N-DD



YSZA1290N-DD

## REEL LOCKING PIN



RA-LP-YS

## ROLLER HOSE GUIDE



- RA-RG-YSWA – H1 Reel Roller Guide
- RA-RG-YSXA – H2 Reel Roller Guide
- RA-RG-YSYA – H3 Reel Roller Guide
- RA-RG-YSZA – H4 Reel Roller Guide

# Retracta

The Retracta range has now expanded to include sleek new accessories specially designed for our iconic Retracta Hose Reels. From Air Blow Guns, to new fittings and nozzles, all Retracta accessories have been made to compliment our hose reels.



## Aluminum Air Blow Gun Kit

### RA-AGA

- Light weight and durable aluminium body
- ¼" Nitto style fitting included
- 3 Nozzles included for versatile application
- Compact ergonomic handle design



## 100mm Adjustable Flow Air Blow Gun

### RA-AGP

- ¼" Nitto style fitting included
- Adjustable flow control
- Ergonomic handle design
- Steel insert thread connection
- Durable nylon body for impact and wear resistant



## Brass Water Spray Nozzle

### RA-CNB

- Spray adjusts from mist to powerful jet
- Robust brass construction with a soft rubber grip



## Heavy Duty Hot Water Trigger Nozzle

### RA-HGB

- Adjustable spray pattern by trigger (conical/pencil)
- Swivel inlet
- Ergonomic design
- Lightweight plastic construction with trigger guard
- Heavy duty Shock proof rubber ring



## Hot Water Trigger Nozzle

### RA-HGP


- Adjustable spray pattern by trigger (conical/pencil)
- Swivel inlet
- Ergonomic design
- Lightweight construction with trigger guard
- Shock proof protective rubber ring



## Coolant / Water Bib Dispenser Valve

### RA-CBM

- Curved rubber tip for ease of dispensing
- Coolant / Water bib
- Coolant / Water faucet
- Radiator bib



## R3 Multi Position Locking Bracket

### RA-MLB

- Hold and lock hose reel at desired angle and direction
- Simple setup and easy to adjust
- Compatible to existing Retracta R3 hose reels

#### AIR BLOW GUN

RA-AGA *	Aluminium Air Blow Gun Kit
RA-AGP *	100mm Adjustable Flow Air Blow Gun

#### WATER NOZZLES

RA-CNB	Brass Water Spray Nozzle
RA-HGB	Heavy Duty Hot Water Trigger Nozzle
RA-HGP	Hot Water Trigger Nozzle
RA-CBM	Coolant / Water Bib Dispenser Valve

#### LOCKING BRACKET

RA-MLB	R3 Multi Position Locking Bracket
--------	-----------------------------------

**12**  
MONTHS  
MACNAUGHT  
WARRANTY

For a light weight and easy to handle air hose, try out our RetractaFLEX Air Hose. This hybrid polymer high flex hose is kink-free under pressure and features a HI-VIS orange colour for workplace safety.



## RETRACTAFLEX AIR HOSE

AH1020	3/8" x 20m with Nitto Style Coupler
AH1030	3/8" x 30m with Nitto Style Coupler
AH1210	1/2" x 10m with Nitto Style Coupler
AH1220	1/2" x 20m with Nitto Style Coupler
AH1230	1/2" x 30m with Nitto Style Coupler

## RetractaFLEX AIR HOSE

- Hybrid polymer high flex hose
- Kink-free under pressure
- Memory free hose, lays flat on the floor
- Light weight and easy to handle
- Nitto style 1 touch quick release fittings



## NITTO STYLE AIR FITTING

RA-20PM	¼" Nitto Style Plug ¼" Bsp Male Air Fitting
RA-20PF	¼" Nitto Style Plug ¼" Bsp Female Air Fitting
RA-20SM	¼" Nitto Style Socket ¼" Bsp Male Air Fitting
RA-20SF	¼" Bsp Female Fitting to Nitto Socket
RA-30SF	3/8" Bsp Female Fitting to Nitto Socket
RA-30SH30PH	Nitto Style Air Fitting Set for 3/8" Hose
RA-40SH40PH	Nitto Style Air Fitting Set for 1/2" Hose

## Nitto Style Air Fitting

- Compatible with genuine Nitto couplings air tool fitting
- Corrosion resistant with Chrome plated steel
- Maximum working pressure up to 215 psi (15 bar)

# P Series

# COMPRESSED AIR & WATER


## P SERIES FEATURES

- Stop anywhere hose latch system
- 180° Swivel wall mounting bracket
- UV and impact resistant case
- Hose layering technology to avoid hose bunch up

## AIR / WATER

An economical hybrid polymer hose, maximum working pressure 300 psi.




Case Colour	Black		
Part Number	L-AWP1015	L-AWP1030	L-AWP1220
Hose Size (ID)	3/8" (10mm)		1/2" (12mm)
Hose Length	15m	30m	20m
Feed Hose Length	1.5m	2m	2m
Hose Colour	Red 		
Feed Hose Inlet	1/4" BSP (M)		3/8" BSP (M)
Hose Outlet	1/4" BSP (M)		3/8" BSP (F)
Hose Material	Hybrid Polymer Hose		
Working Pressure	300 psi		
Max Temperature	60°C		

## GARDEN / HORTICULTURE

An economical PVC hose, maximum working pressure 150 psi.



Case Colour	Light Grey
Part Number	L-DRP1225
Hose Size (ID)	1/2" (12mm)
Hose Length	25m
Feed Hose Length	2m
Hose Colour	Light Grey 
Feed Hose Inlet	1/2" Quick Connector (F)
Hose Outlet	1/2" Quick Connector (F)
Hose Material	PVC Hose
Working Pressure	150 psi
Max Temperature	60°C

# METAL REELS

Also available in the Lubmate family of hose reels are the E and L Series metal reels. These are an economical choice of reels available in a core range including enclosed case, single pedestal and twin pedestal to suit a variety of applications.

## E SERIES

Sleek durable enclosures to minimize profile for mounting in banks of multiple reels. Fixed or swivel designs, stamped form for strength and fully enclosed springs for protection.



EK



EL

## L SERIES

Single and twin pedestal reels with robust steel frames, powder coated for durability. Long lasting fully enclosed spring. Multiple guide arm positions to suit mounting on a bench, ceiling, wall or service truck.



LH



LS



LT



LH





T +61 2 9567 0401  
E [info@macnaught.com](mailto:info@macnaught.com)  
W [www.macnaught.com](http://www.macnaught.com)

For Macnaught warranty,  
terms and conditions see  
[macnaught.com/warranty](http://macnaught.com/warranty)

