


AIR OPERATED DIAPHRAGM PUMP - 3/4" NITRILE ALUMINIUM

12
MONTHS
MACNAUGHT
WARRANTY

Designed with versatility in mind, the Lubemate 12V DC Oil Transfer Pump effortlessly handles a range of fluids, including Diesel, Kerosene, and light oils with a viscosity of less than 500CST. Whether you're in the automotive industry, agriculture, or construction, this pump is designed with quality in mind.

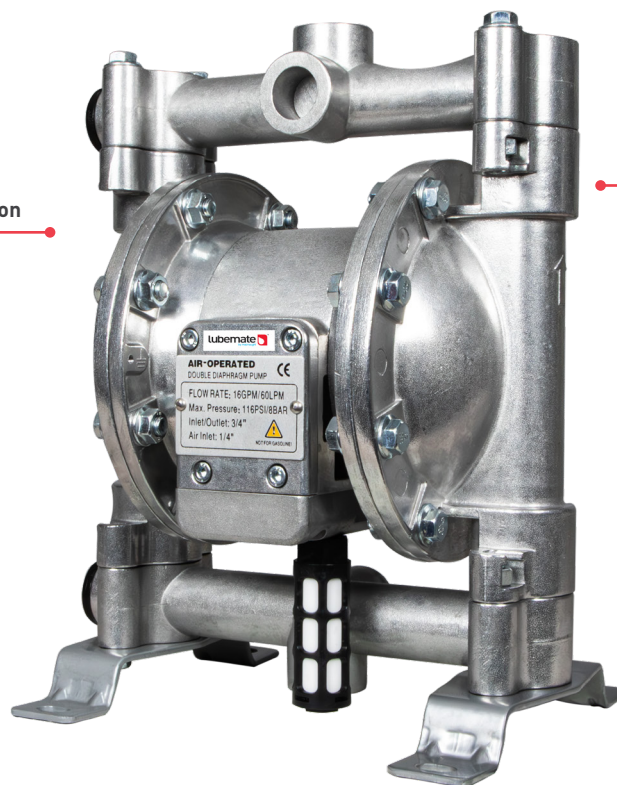

Heavy Duty aluminium construction

Max Pressure : 115 PSI

Flow Rate: upto 60LPM

P/N: L-DDP19NA

FEATURES & BENEFITS

- Heavy Duty aluminium construction.
- Included ground capability to eliminate static discharge
- Self Priming Double Diaphragm Pump.
- Suitable to use with Diesel, Kerosene, light oils with viscosity less than 500CST.
- Ability to run dry.
- Variable flow rate and discharge pressure.
- Portable and simple installation.
- Constant Pumping efficiency.

TECHNICAL SPECIFICATIONS

- Inlet/outlet : 3/4" BSP
- Flow Rate: up to 60LPM
- Air Inlet: 1/4" BSP
- Max Pressure : 115 PSI
- Wetted Components: Polypropylene and NBR

PACKAGE INCLUDE

- 1 unit of Diaphragm Pump
- 1 unit of Instruction Manual