

High Flow Auto Diesel Nozzle


L-FNAD200



The Lubemate Automatic Diesel Nozzle is built for durability and efficiency. Designed for high-flow diesel dispensing, this heavy-duty automatic nozzle ensures seamless fuel transfer while preventing overflows with its auto shut-off feature. Designed for tough environments, the L-FNAD200 delivers reliable performance, making refueling faster, safer and efficient.

Automatic Shut-off

Prevent overfills & wastage

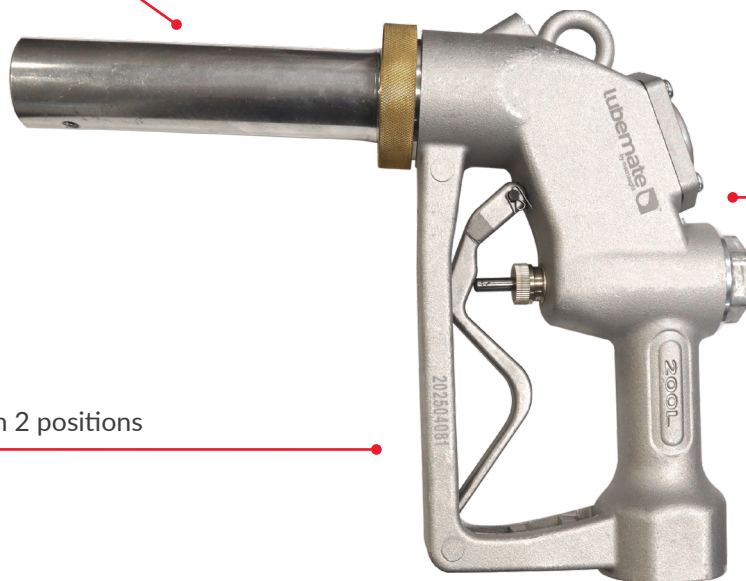

Aluminium Body

Lightweight yet durable and strong

Trigger Lock

Allows flow control in 2 positions

TECHNICAL SPECIFICATIONS

- Flow Rate: up to 200 LPM
- Inlet: 1.5" BSPP (F)
- Outlet Spout Diameter: 38 mm
- Suitable Fluids: Diesel & Kerosene
- Temp. Range: -25°C to 55°C
- Maximum Working Pressure: 50 PSI

RECOMMENDED FOR USE WITH



Straight Swivel 1.5" (L-FS38)

APPLICATIONS:

- Automotive Workshops
- Trucks & Buses
- Mining
- Agriculture
- Construction Machinery
- Earthmoving Equipments
- Marine
- Industrial

*This nozzle is not intended for use at service stations (servo) / fuel stations or gas stations



Lubemate® is a practical, cost-effective range of equipment brought to you by the trusted team at Macnaught®. All Lubemate products are specially selected by our experienced technical team at Macnaught, ensuring they meet our strict quality standards. AU: Macnaught Pty Ltd 41-49 Henderson St, Turrella NSW 2205. Ph: 1800 185 102 Fax: +61 2 9597 7773 Email: info@macnaught.com.au Website: macnaught.com. NZ: Macnaught NZ 2/1 Hautu Drive, Wiri Auckland Macnaught Pty Ltd Ph: 0800 023 510 Email: nzorders@macnaught.com.au